

## BCS-B-TI213IR2

IR Network Bullet Camera 2Mpx with lens 2.8~8mm and built-in microphone




ONVIF®

## Key features:

- Sensor 1/2.8" 2Mpx PS CMOS
- Dual stream coding
- Resolution 1920×1080@30fps
- Compression H.265+/H.264+
- IR-cut filter with auto switch (ICR)
- Functions AGC, AWB, AES, BLC, D-WDR, 3D DNR, ROI
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P, Onvif
- Motion detect, privacy masking
- Varifocal lens 2.8~8mm F1.9
- IR distance up to 20m
- Edge storage microSD up to 128GB
- Service video out CVBS
- Metal outside casing IP66
- Built-in microphone
- Working environment -30°C ~ +60°C
- Power supply DC 12V, PoE

## Dimensions:

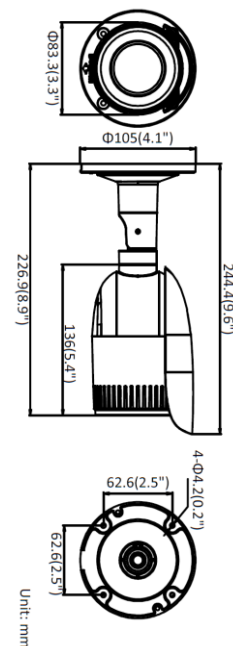

## BCS-B-TI213IR2

IR Network Bullet Camera 2Mpx with lens 2.8~8mm and built-in microphone

### Specification:

System video	IP
System scanning	Progressive Scan
Sensor	1/2.8" 2Mpx CMOS
Pixels	1920(H) × 1080 (V)
Minimum illumination	Color: 0.01Lux@(F1.2, AGC On), 0.025 Lux@(F1.9, AGC On), B/W:0Lux
Lens	Varifocal 2.8~8mm F1.9, angle of view H: 111°~54.7°, V: 57.8°~30.5°
White balance	(AWB) Auto/manual
Backlight compensation	BLC / D-WDR
Shutter	Auto/manual (1/3~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	3D DNR
Day/night	IR-cut filter with auto switch (ICR)
IR range	Up to 20m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG(second stream)
Resolution	1080P(1920×1080) / 960H(1280×960) / 720P(1280×720) / VGA(640×480) / (640×360) / QVGA(320×240)
Main stream	50Hz: 25fps (1920×1080, 1280×960, 1280×720) 60Hz: 30fps (1920×1080, 1280×960, 1280×720)
Second stream	50Hz: 25fps (640×480, 640×360, 320×240) 60Hz: 30fps (640×480, 640×360, 320×240)
Audio	Built-in microphone
Audio compression	G.711/G.722.1/G.726/MP2L2/PCM
Network	RJ-45 (10M/100M)
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, P2P
Compatibility	ONVIF(Profile S, Profile G), ISAPI
Users	Max 32
Mobile	iOS, android
Power supply	DC12V(±25%) / PoE(802.3 af)
Power consumption	<13W
Working environment	-30°C ~ +60°C, 10%~95% RH
Casing	Metal IP66
Weight	1kg
Dimensions	Φ105 × 244.4mm

