



BCS-B-SP08G-2SFP

8 ports switch (8×PoE) 1000Mbps + 2×Gigabit SFP with 4 modes

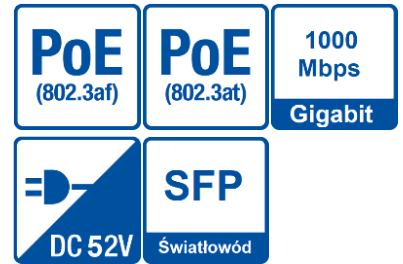

- 8 ports switch PoE
- 4 modes: AI VLAN, AI EXTEND, AI PoE, AI QoS
- Standard IEEE802.3 af/at
- Max power output 30W for single PoE port
- 8 ports PoE 1000Mbps
- 2 ports fiber SFP Gigabit
- Functions MDI/MDIX
- Transmission up to 250m
- Function VLAN
- Reset button
- Metal casing
- Power supply 52V DC 1.85A included

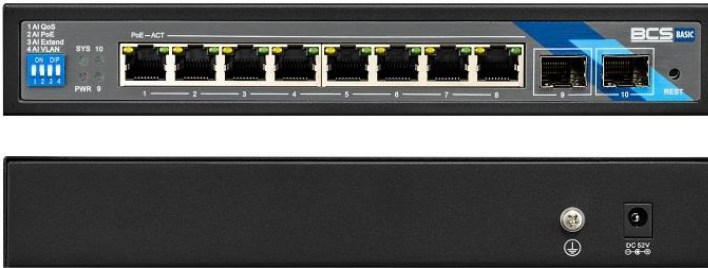

BCS-B-SP08G-2SFP

8 ports switch (8×PoE) 1000Mbps + 2×Gigabit SFP with 4 modes

Ports	8 × RJ45 PoE 1000Mbps + 2 × SFP Gigabit
Ports Uplink (MDI/MDIX)	10/100/1000Mbps half-duplex, full duplex, auto-negotiation
Transfer Standard	IEEE802.3 af/at
Standard	14.8Mpps
Pocket forwarding	20Gbps
Capacity	30W for single port PoE (total 96W)
Max power output	Ports 1, 2, 3, 4, 5, 6, 7, 8 isolated
Mode AI VLAN	Porty 1, 2, 3, 4, 5, 6, 7, 8 transmission extended to 250m (cat5e, cat6) capacity 10Mbps
Mode AI EXTEND	Quality Of Service – priority video pockets
Mode AI QOS	Monitoring ports supply PoE devices and automatic restart with power supply cut when not responding
Mode AI PoE	PWR(constant yellow): power supply LINK/ACT(green): device plugged in PoE(yellow): PoE power supply
Leds status	1,2(+); 3,6(-)
PoE pin	In: 100~240V AC 50/60Hz out: 52V DC 1.85A
Power	225×120×35mm
Dimensions	0.8kg
Weight	0°~40°C, 10%~90%RH

