


BCS-B-SP2402G-2SFP-II

24-port switch (24 × PoE) 100Mbps + 2 × Gigabit (RJ45 & SFP) with 4 modes



- 24-port PoE switch
- 4 modes of operation: QoS, PoE, Extend, VLAN
- IEEE802.3 af / at standard
- Maximum power up to 30W for a single PoE port
- 24 PoE 100Mbps ports
- 2 RJ45 uplink Gigabit ports
- 2 SFP Gigabit fiber ports
- MDI / MDIX function
- Transmission up to 250m
- VLAN function
- Metal housing
- Can be installed in a 1U RACK cabinet
- Cooling fan inside the case
- 100 ~ 240V AC power supply

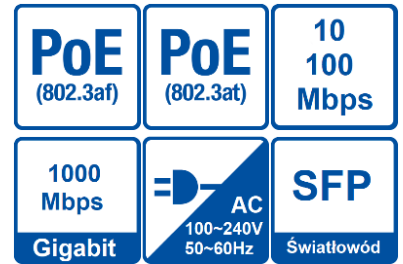

BCS-B-SP2402G-2SFP-II

24-port switch (24 × PoE) 100Mbps + 2 × Gigabit (RJ45 & SFP) with 4 modes

Ports	24 × RJ45 PoE 100Mbps + 2 × RJ45 & SFP Gigabit
Uplink ports (MDI / MDIX)	2 × RJ45 & SFP Gigabit
Transfer	10/100 / 1000Mbps half duplex, full duplex, auto negotiation
Standard	IEEE802.3 af / at
Forwarding Packets	6.55Mpps
Capacity	8.8Gbps
Maximum power	30W for a single PoE port (total power 250W)
AI VLAN mode	Ports 1-24 are isolated
AI EXTEND mode	Ports 1-8 support transmission up to 250m (cat5e, cat6)
AI QOS mode	Quality Of Service - prioritization of video packets
AI PoE mode	Monitoring of the ports that supply PoE devices and automatic restart by cutting off the power supply when an unresponsive device is detected
LED status	PWR (steady red): power to the switch connected LINK / ACT (green): connected device PoE (yellow): PoE powered device
PoE pin	1,2(+); 3,6(-)
Power	100~240V AC 50/60Hz
Dimensions	440×180×44mm
Weight	2.4kg
Working conditions	0°~40°C, 10%~90%RH

