


## BCS-XVR04014KE-E-II

4 channel 1 HDD video recorder 5-system HDCVI/AHD/TVI/ANALOG/IP

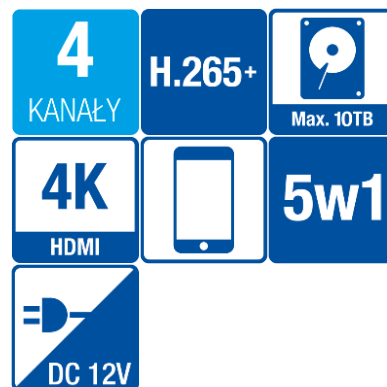

### Key features:

- Display and record 4 channels plus additional 2 IPC
- Compression H.265+/H265/H.264+/H.264
- Recording 4 channels HDCVI/AHD/TVI max. 4K@7fps(only 1 channel), 6M@10fps, 5M@12fps, 4M/3M@15fps, 4M-N/1080P/720P/960H@25/30fps or IPC and additional 2 IPC
- Max incoming bandwidth 24Mbps
- Automatic recognize the system signal of camera
- Max IPC input: 6 up to 8Mpx
- Synchronous video HDMI 4K(3840×2160) / VGA(1920×1080)
- Advanced video detection: motion detect, video loss, tampering
- support 1 × SATA up to 10TB
- 2×USB, RJ45
- 1 audio in / 1 audio out
- Web-service, support CMS (BCS Manager), mobile app BCS (iOS, android), P2P
- Power supply 12V DC

### Dimensions:



## BCS-XVR04014KE-E-II

4 channel 1 HDD video recorder 5-system HDCVI/AHD/TVI/ANALOG/IP

### Specification:

System	HDCVI/AHD/TVI/ANALOG/IP
Processor	Embedded processor
Operating system	LINUX
Functionality	Real-time view, record, playback, backup, remote access
System control	Mouse, network
Video input	4
Video out	1×HDMI 4K, 1×VGA 1080P
Resolution	HDMI 4K: 3840×2160, 2560×1440, 1920×1080, 1280×1024, 1280×720 VGA: 1920×1080, 1280×1024, 1280×720
Multi-screen display	1/4/6
Sequence	Yes
Privacy mask	4 adjustable areas for channel
OSD	Camera title, time, video loss, camera lock, motion detect, recording
Main stream video	4K(3840×2160)@7fps(tylko 1 kanał) / 6M(2880×1920)@10fps / 5M(2592×1944)@12fps / 4M(2560×1440)@15fps / 3M(2048×1536)@15fps / 4M-N(1280×1440)@25/30fps / 1080P(1920×1080)@25/30fps / 720P(1280×720)@25/0fps / 960H(960×576)@25/30fps / D1(704×576)@25/30fps / CIF(352×288)@25/30fps
Second stream video	960H(960×576)@15fps / D1(704×576)@15fps / CIF(352×288)@15fps
Bandwidth	Incoming: 24Mbps, Outgoing: 24Mbps
Bitrate	32~6144Kbps for channel
Video compression	H.265+/H265/H.264+/H.264
Support camera	HDCVI up to 4K / AHD up to 5Mpx / TVI up to 5Mpx / IP up to 8Mpx / ANALOG CVBS
Audio	1 audio in / 1 audio out
Audio compression	AAC(only 1 channel)/G.711a/G.711u/PCM
Record mode	Manual, Schedule (Continuous, MD – Motion Detect, video loss, tampering), Alarm, Stop
Record interval	1~60 min. (default: 60 min.), Pre-record: 1~30s, Post-record: 10~300s
Trigger events	Recording, PTZ, tour, E-mail, FTP, Snapshot, Video push, Buzzer, Screen tips
Motion Detect	Zones: 396 (22×18), regions, sensitivity, threshold
Playback	1/4/6
Backup	Pamięć flash (USB) /network download
Network interface	1 Port RJ-45 (10/100M)
Protocols	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, SNMP, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search
Storage	1×SATA max 10TB
Interfaces	1×USB 2.0 (front) / 1×USB2.0 (back)
Power supply	12VDC/2A, Power consumption < 10W (without HDD)
Working environment	-10°C ~+55°C / 10~90%RH
Dimensions and weight	smart, 205mm×211mm×45mm(W×D×H), 0.5kg(without HDD)

