



BCS-DMIP2401IR-Ai

Network Eyeball Camera 4Mpx with 2.8mm lens

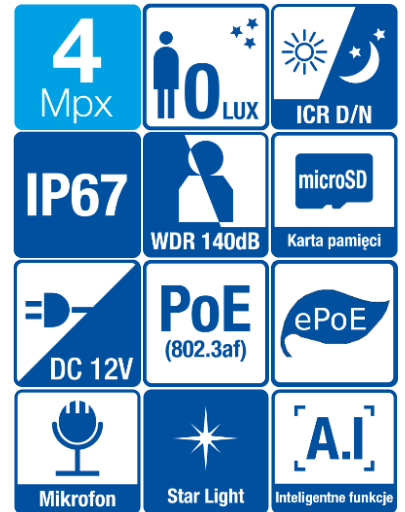

ONVIF®

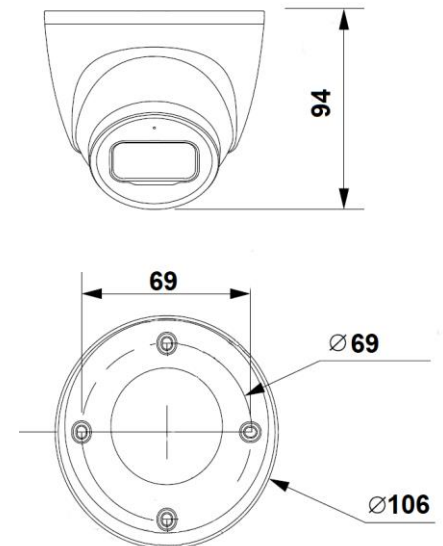

- Sensor 1/1.8" 4Mpx PS CMOS
- Starlight technology
- Compression H.265+/H.264+/H.264B/MJPEG
- Triple stream coding
- IR cut filter with auto-switch ICR
- Functions AGC, AES, AWB, BLC, HLC, WDR(140dB), ROI, 3D DNR
- Fixed lens 2.8mm F1.6
- IR range up to 50m
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P, Onvif
- Motion detect, privacy masking
- Intelligent functions: crossline, intrusion, perimeter protection, people counting, missing/abandoned object, heat map
- Built-in microphone
- Outside metal casing IP67
- Edge storage microSD max. 256GB
- Lighting protection 6KV
- Power supply 12V DC and PoE

BCS-DMIP2401IR-Ai

Network Eyeball Camera 4Mpx with 2.8mm lens

Scanning system	Progressive Scan
System	IP
RAM/ROM	512MB/128MB
Sensor	1/1.8" 4Mpx CMOS
Pixels	2688(H) × 1520(V)
Min illumination	0.002Lux/F1.6 (Color), 0Lux/F1.6 (IR On)
White balance	(AWB) Auto/manual
Lens	Fixed 2.8mm F1.6
Angle of view	H: 113°, V: 60°
DORI(Detect/Observe/Recognize/Identify)	58m/23m/12m/6m
Backlight compensation	BLC / HLC / WDR(140dB)
Shutter	Auto/manual (1/3~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	3D DNR
Motion detect	4 areas
Privacy masking	4 areas
Image rotate	Mirror, flip 90°, 180°, 270°
Focus	Auto
Day/night	IR cut filter witch auto-switch ICR
IR range	50m
Video compression	H.265 / H.265+ / H.264 / H.264+ / H.264B / H.265H / MJPEG
Main stream	2688×1520(1fps-25/30fps) 2560×1440(1fps-25/30fps) 1920×1080(1fps-50/60fps)
Second stream	D1 (1 fps-25/30 fps) D1 (1 fps-50/60 fps)
Third stream	1080P (1 fps-6 fps)
Bitrate	H.264: 32 Kbps-8192 Kbps H.265: 19 Kbps-8192 Kbps
Audio	Built-in microphone
Audio compression	G.711A; G.711Mu; G.726; AAC; G.723
Network	RJ-45 (10/100Base-T)
Protocols	IPv4;IPv6;HTTP;HTTPS;TCP;UDP;ARP;RTP;RTSP;RTCP;RTMP;SMTP;FTP;SFTP;DHCP; DNS;DDNS;QoS;UPnP;NTP;Multicast;ICMP;IGMP;NFS;PPPoE;802.1x;SNMP
Compatibility	ONVIF(Profil S/Profil G/Profil T);CGI; P2P
Users	Max 20 logged in
Mobile	iOS, android
Edge storage	microSD up to 256GB
Power supply	DC12V (±30%) / PoE(802.3af) / ePoE
Power consumption	<7.2W
Working environment	-30°C ~ +60°C, ≤ 95% RH
Casing	Outside metal IP67
Weight	0.55kg
Dimensions	φ106mm×94mm



BCS-DMIP2401IR-Ai

Network Eyeball Camera 4Mpx with 2.8mm lens

Junction box
BCS-ADMM



Junction box
BCS-AT135



Junction box
BCS-AT48



Wall mount
BCS-UDU

