



BCS-TIP8201IR-Ai-0735

Network bullet camera 2Mpx with motozoom 7-35mm

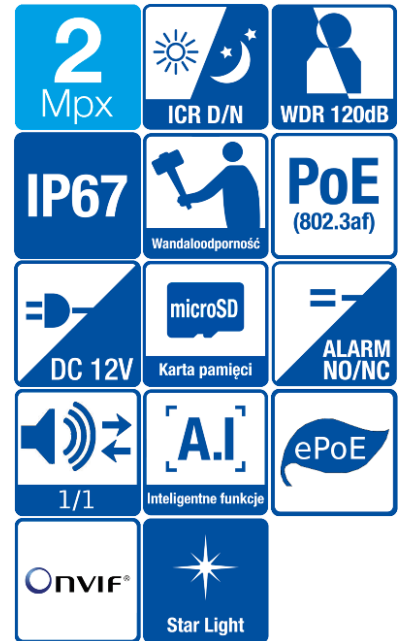

- Sensor 1/2.8" 2Mpx PS CMOS
- Starlight technology
- Compression H.265+/H.264+/MJPEG
- Triple stream coding
- Motozoom lens 7-35mm F1.3
- IR cut filter with auto-switch ICR
- Built-in web service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P, Onvif
- Functions AWB, AES, AGC, BLC, HLC, WDR(120dB), Ultra DNR, Defog, ROI, EIS
- Advanced intelligence: perimeter protection, face detect, object recognize, metadata, real-time analyze, advanced search, people counting, missing/abandoned object, audio detect
- IR range up to 120m
- 1 audio in / 1 audio out
- 2 alarm in / 1 alarm out
- Outside metal casing IP67, IK10
- Working environment -30°C ~ +60°C
- Surge protection 6KV
- Edge storage up to 256GB
- Power supply DC12V, PoE(802.3af), ePoE

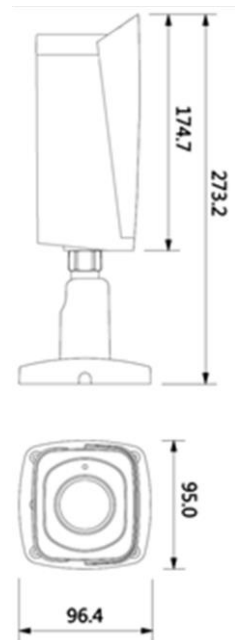

BCS-TIP8201IR-Ai-0735

Network bullet camera 2Mpx with motozoom 7-35mm

Video system	IP
Scanning system	Progressive Scan
Sensor	1/2.8" 2Mpx CMOS
RAM/ROM	512MB/128MB
Pixels	1920×1080
Min. illumination	0.0015Lux/F1.3(Color); 0Lux/F1.3(IR On)
S/N ratio	>50dB
Lens	Motozoom 7~35mm; F1.3
Angle of view	H: 33°-10°, V: 19°-5°
DORI	Wide: Detect 7m: 131m/ Observe 52m/ Recognize 26m/ Identify 13m Tele: Detect 35m: 428m/ Observe 171m/ Recognize 86m/ Identify 43m
White balance	(AWB) Auto/manual
Backlight compensation	BLC/HLC/WDR(120dB)
Shutter	1/3~1/100000s
Gain control	(AGC) Auto/manual
Noise reduction	Ultra 2D/3D DNR
Motion detect	4 areas
Privacy masking	4 areas
Image rotate	Mirror, Flip 0°/90°/180°/270°
Focus	Auto/manual
Day/night	IR cut filter with auto-switch
IR range	120m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	1080P(1920×1080) / 1.3 M(1280×960) / 720P(1280×720) / D1(704×576 / 704×480) / VGA(640×480) / CIF(352×288 / 352×240)
Main stream	1080P (1 fps-25/30 fps)
Second stream	D1 (1 fps-25/30 fps)
Third stream	1080P (1 fps-6 fps)
Bitrate	H.264: 32 Kbps-8192 Kbps H.265: 19 Kbps-7424 Kbps
Network	RJ-45 (10/100Base-T)
Protocols	IPv4;IPv6;HTTP;HTTPS;TCP;UDP;ARP;RTP;RTSP;RTCP;RTMP;SMTP;FTP;SFTP;DHCP; DNS;DDNS;QoS;UPnP;NTP;Multicast;ICMP;IGMP;NFS;PPPoE;802.1x;SNMP
Audio	1 in / 1 out
Audio compression	G.711a/ G.711Mu/ AAC/ G.726/G.723
Alarm	2 input 5mA 5VDC / 1 output 300mA 12VDC
Compatibility	ONVIF(S/G/T)
Users	Max. 20 logged in
Mobile	iOS, android
Edge storage	microSD do 256GB
Power supply	DC12V(±30%), PoE(802.3af), ePoE, Power consumption <10.3W
Working environment	-30°C ~+60°C / 10~95%RH
Casing	Outside metal IP67, IK10
Dimensions and weight	273.2mm×95.0mm×95.0mm 1.1kg

