


BCS-L-TIP14FR3-W

4Mpx network bullet camera with 2.8mm lens and WiFi



- WiFi technology - wireless connection of the camera to the network
- 1/3 "4Mpx PS CMOS sensor
- H.265 + / H.264 + / MJPEG encoding
- Support for two coding streams
- AGC, AES, AWB, BLC, HLC, DWDR, ROI, 3DNR functions
- ICR mechanical infrared filter
- Infrared range up to 30m
- 2.8mm F2.0 lens
- Built-in web service, compliance with BCS-NVR, CMS (BCS Manager), BCS mobile application (iOS, android), P2P, Onvif
- Motion detection, privacy masks
- IP67 metal outdoor housing
- MicroSD memory card slot max. 256GB
- 12V DC power supply

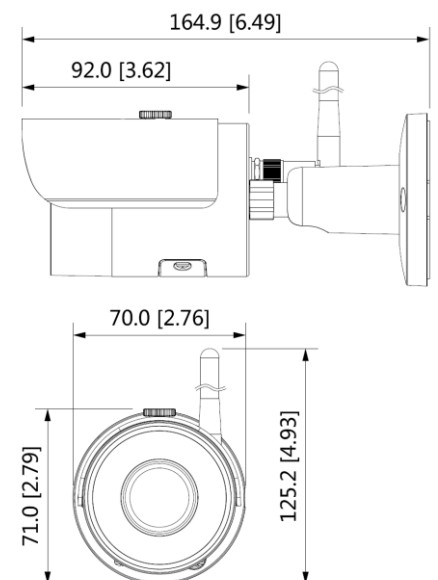

BCS-L-TIP14FR3-W

4Mpx network bullet camera with 2.8mm lens and WiFi

Scanning system	Progressive Scan
System	IP
RAM / ROM	256MB/128MB
Sensor	1/3" 4Mpx CMOS
Pixels	2560(H) × 1440(V)
Min illumination	Manual 1/30s 0.093 Lux @F2.0(Color, 80 IRE); 0.092 Lux @F2.0(W/B, 80 IRE); 0 Lux (IR on) Manual 1/3s 0.1195 Lux @F2.0 (Color, 80 IRE); 0.119 Lux @F2.0(W/B, 80 IRE); 0 Lux (IR on)
S / N ratio	>52dB
White balance	(AWB) Auto/manual
Lens	2.8mm F2.0
Focus	Fixed
Iris	Fixed
Viewing angle	Horizontal: 97° Vertical: 52° Diagonal: 116°
DORI	Detect 56m/ Observe 22m/ Recognize 11m/ Identify 6m
Background compensation	BLC / HLC / DWDR
Shutter	Auto/manual (1/3~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	3D DNR
Motion detection	4
Privacy zone	4
ROI	4
Image rotation	Mirror, flip 90°, 180°, 270°
Day Night	IR cut filter with auto-switch ICR
IR	30m
Video compression	H.265 / H.265+ / H.264 / H.264+ / H.264H / H.264B / MJPEG(second stream)
Resolution	4M(2560 × 1440); 3M(2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720P (1280 × 720); VGA (640 × 480); (640 × 360)
Main stream	4M(1-20fps); 3M/1080p/1.3M/720p/(1-25/30 fps)
Second stream	VGA/(640 × 360)/QVGA(1-25/30 fps)
Bitrate	H.264: 24 kbps-8192 kbps H.265: 9 kbps-7424 kbps
Network connection	RJ-45 (10/100 Base-T)
Wi-Fi	IEEE802.11b/g/n(2.4GHz)
Protocols	HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; IPv4/v6; QoS; NTP; RTMP
Compatibility	ONVIF(S/G/T)
Users	Max 20 logged in
Mobile users	iOS, android
Memory card slot	microSD do 256GB
Power	DC12V (±30%)
Power consumption	<5.4W
Working conditions	-30°C ~ +50°C, ≤ 95% RH
Case	Metal IP67
Weight	0.43kg
Dimensions	164.9 mm × 70 mm × 125.2 mm



BCS-L-TIP14FR3-W

4Mpx network bullet camera with 2.8mm lens and WiFi

Adapter
BCS-AT3



Adapter
BCS-AT356



Adapter
BCS-AT135

