


BCS-L-TIP54FC-Ai2

NightColor 4Mpx bullet camera with 3.6mm lens



- NightColor technology - color images even in poor lighting conditions
- Sensitivity 0.001Lux@F1.0
- 1 / 1.8 "4Mpx PS CMOS sensor
- H.265 + / H.264 + / MJPEG encoding
- Support for three coding streams
- AGC, AES, AWB, BLC, HLC, WDR (140dB), ROI, 3DNR functions
- 3.6mm F1.0 lens
- Built-in web service, compliance with BCS-NVR, CMS (BCS Manager), BCS mobile application (iOS, android), P2P, Onvif
- Motion detection, privacy masks
- Intelligent functions: perimeter protection, line crossing, intrusion into an area, face detection, people counting, intelligent search, heat map, lost / left object, audio detection
- 1 input and 1 alarm output
- 1 audio input and 1 audio output
- IP67 metal outdoor housing
- MicroSD memory card slot max. 256GB
- 12V DC / PoE (802.3af) power supply

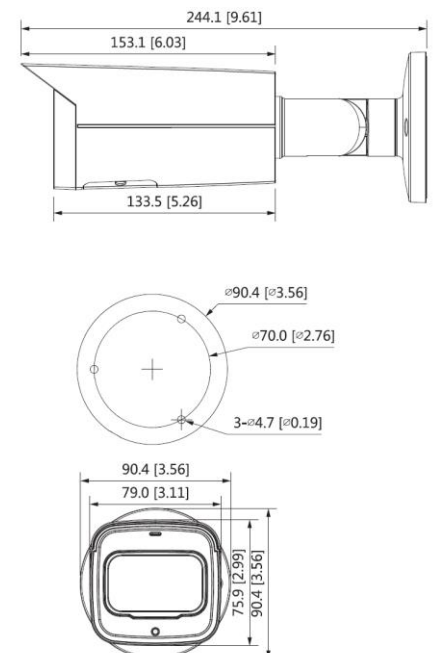

BCS-L-TIP54FC-Ai2

NightColor 4Mpx bullet camera with 3.6mm lens

Scanning system	Progressive Scan
System	IP
RAM / ROM	1GB/128MB
Sensor	1/1.8" 4Mpx CMOS
Pixels	2688(H) × 1520(V)
Min illumination	0.001Lux@F1.0
White balance	(AWB) Auto/manual
Lens	3.6mm F1.0
Focus	Fixed
Iris	Fixed
Viewing angle	Horizontal: 93° Vertical: 50°
DORI	Detect 70m/ Observe 28m/ Recognize 14m/ Identify 7m
Background compensation	BLC / HLC / WDR(140dB)
Shutter	Auto/manual (1/3~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	3D DNR
Motion detection	4 areas
Privacy zone	4 areas
ROI	4 areas
Image rotation	Mirror, flip 90°, 180°, 270°
Day Night	Color/B/W
Video compression	H.265 / H.265+ / H.264 / H.264+ / H.264H / H.264B / MJPEG
Resolution	2688 × 1520/2560 × 1440/2304 × 1296/1080P(1920 × 1080)/1.3M (1280 × 960)/720P (1280 × 720)/D1 (704 × 576/704 × 480)/VGA (640 × 480)/CIF (352 × 288/352 × 240)
Main stream	2688 × 1520 (1 fps–25/30 fps) 2560 × 1440 (1 fps–25/30 fps) 1920 × 1080 (1 fps–50/60 fps)
Second stream	D1 (1 fps–25/30 fps) D1 (1 fps–50/60 fps)
Third stream	1080P (1 fps–16 fps)
Bitrate	H.264: 32 kbps–8192 kbps H.265: 19 kbps–8192 kbps
Network connection	RJ-45 (10/100Mbps)
Protocols	IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; 802.1x; SNMP
Audio	1 in / 1 out
Audio compression	G.711a; G.711Mu; G.726; AAC; G.723
Alarm	1 in 5mA 5V DC / 1 out 300mA 12V DC
Compatibility	ONVIF(S/G/T)
Users	Max 20 logged in
Mobile users	iOS, android
Memory card slot	microSD 256GB
Power	DC12V (±30%) / PoE(802.3af) / ePoE
Power consumption	<4.4W
Working conditions	-40°C ~ +60°C, ≤ 95% RH
Case	Metal IP67
Weight	0.8kg
Dimensions	244.1 mm × 79.0 mm × 75.9 mm



BCS-L-TIP54FC-Ai2

NightColor 4Mpx bullet camera with 3.6mm lens

Junction box
BCS-AT5V



Junction box
BCS-AT135



Junction box
BCS-AT356

