

BCS-TIP3401IR-E-V

Network Bullet Camera 4Mpx with lens 2.8mm




Key features:

- Sensor 1/3" 4Mpx PS CMOS
- Compression H.265+/H.264+/MJPEG
- Dual stream coding
- IR cut filter with auto-switch ICR
- Functions AGC, AES, AWB, BLC, HLC, WDR(120dB), ROI, 3DNR
- Fixed lens 2.8mm F1.6
- IR range up to 30m
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P, Onvif
- Motion detect, privacy masking
- Intelligent functions: crossline, intrusion
- Outside metal casing IP67
- Edge storage microSD max. 256GB
- Power supply 12V DC i PoE



ONVIF®

Dimensions:

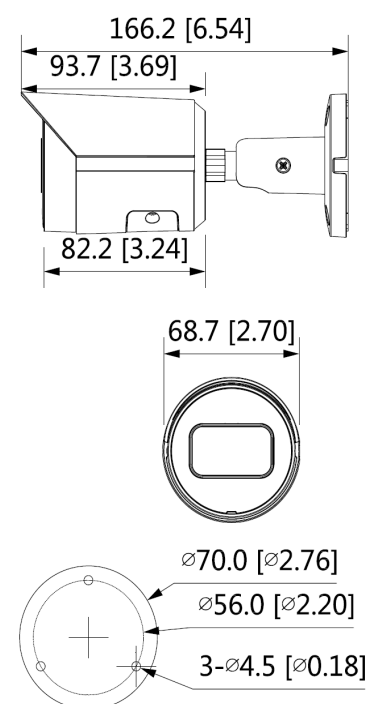

BCS-TIP3401IR-E-V

Network Bullet Camera 4Mpx with lens 2.8mm

Specification:

| | |
|---|--|
| Scanning system | Progressive Scan |
| System | IP |
| RAM/ROM | 128MB/128MB |
| Sensor | 1/3" 4Mpx CMOS |
| Pixels | 2688(H) × 1520(V) |
| Min. Illumination | 0.008Lux/F1.5 (Color), 0Lux/F1.5 (IR On) |
| White balance | (AWB) Auto/manual |
| Lens | Fixed 2.8mm F1.6 |
| Angle of view | H: 102°, V: 55° |
| DORI(Detect/Observe/Recognize/Identify) | 56m/22m/11m/6m |
| Backlight compensation | BLC / HLC / WDR(120dB) |
| Shutter | Auto/manual (1/3~1/100000s) |
| Gain control | (AGC) Auto/manual |
| Noise reduction | 3D DNR |
| Motion detect | 4 areas |
| Privacy masking | 4 areas |
| Image rotate | Mirror, flip 90°, 180°, 270° |
| Focus | Auto |
| Day/night | IR cut filter with auto-switch ICR |
| IR | 1 led IR range up to 30m |
| Video compression | H.265 / H.265+ / H.264 / H.264+ / MJPEG |
| Resolution | 4M(2688×1520) / 4M(2560×1440) / 3M(2304×1296) / 1080P(1920×1080) / 1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / VGA(640×480) / CIF(352×288/352×240) |
| Main stream | 4M(2688×1520)(1~20fps), 4M(2560×1440)/3M/1080P/1.3M/720P(1~25/30fps) |
| Second stream | D1/VGA/CIF(1~25/30fps) |
| Bitrate | H.264: 32Kbps~6144Kbps, H.265: 12Kbps~6144Kbps |
| Network | RJ-45 (10/100Base-T) |
| Protocols | IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP ; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; 802.1x; Bonjour |
| Compatibility | ONVIF(Profil S/Profil G/Profil T);CGI; P2P; Milestone; Genetec |
| Users | Max 20 logged in |
| Mobile | iOS, android |
| Edge storage | microSD up to 256GB |
| Power supply | DC12V (voltage tolerance ±30%) / PoE(802.3af) |
| Power consumption | <5W |
| Working environment | -40°C ~ +60°C, ≤ 95% RH |
| Casing | Metal IP67 |
| Weight | 0.48kg |
| Dimensions | Φ70mm×166.2mm |



BCS-TIP3401IR-E-V

Network Bullet Camera 4Mpx with lens 2.8mm

Accessories:

Junction box
BCS-AT3



Junction box
BCS-AT135



Junction box
BCS-AT356



Pole mount
BCS-ASM

