


BCS-TIP5401IR-V-VI

Network Bullet Camera 4Mpx with motozoom lens 2.7~13.5mm



- Sensor 1/3" 4Mpx PS CMOS
- Starlight technology
- Compression H.265+/H.264+/MJPEG
- Dual stream coding
- IR cut filter with auto-switch ICR
- Functions AGC, AES, AWB, BLC, HLC, WDR(120dB), ROI, 3DNR
- Motozoom lens 2.7~13.5mm F1.5
- IR range up to 60m
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P, Onvif
- Motion detect, privacy masking
- Intelligent functions: crossline, intrusion
- Outside metal casing IP67
- Edge storage microSD max. 256GB
- Power supply 12V DC / PoE

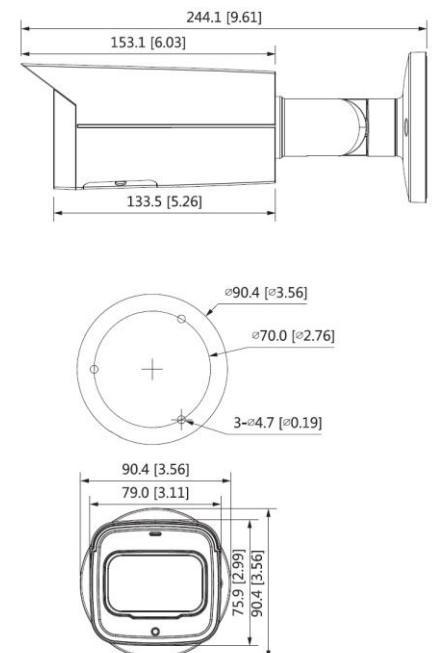

BCS-TIP5401IR-V-VI

Network Bullet Camera 4Mpx with motozoom lens 2.7~13.5mm

| | |
|---|--|
| Scanning system | Progressive Scan |
| System | IP |
| RAM/ROM | 128MB/128MB |
| Sensor | 1/3" 4Mpx CMOS |
| Pixels | 2688(H) × 1520(V) |
| Min. Illumination | 0.008Lux/F1.5 (Color), 0Lux/F1.5 (IR On) |
| White balance | (AWB) Auto/manual |
| Lens | Motozoom 2.7~13.5mm F1.5 |
| Angle of view | H: 104°~27°, V: 55°~15° |
| DORI(Detect/Observe/Recognize/Identify) | W: 64m/26m/13m/6m T: 220m/88m/44m/22m |
| Backlight compensation | BLC / HLC / WDR(120dB) |
| Shutter | Auto/manual (1/3~1/100000s) |
| Gain control | (AGC) Auto/manual |
| Noise reduction | 3D DNR |
| Motion detect | 4 areas |
| Privacy masking | 4 areas |
| Image rotate | Mirror, flip 90°, 180°, 270° |
| Focus | Auto/manual |
| Day/night | IR cut filter with auto-switch ICR |
| IR | 60m |
| Video compression | H.265 / H.265+ / H.264 / H.264+ / MJPEG |
| Resolution | 2688 × 1520 (2688 × 1520); 2560 × 1440 (2560 × 1440); 2304 × 1296 (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 576) |
| Main stream | 2688 × 1520 (1 fps-20 fps) 2560 × 1440 (1 fps-25/30 fps) |
| Second stream | 704 × 576 (1 fps-25 fps) 704 × 480 (1 fps-30 fps) |
| Bitrate | H.264: 32 kbps-6144 kbps H.265: 12 kbps-6144 kbps |
| Network | RJ-45 (10/100Mbps) |
| Protocols | IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP ; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; 802.1x; Bonjour |
| Compatibility | ONVIF(Profil S/Profil G/Profil T);CGI; P2P |
| Users | Max 20 logged in |
| Mobile | iOS, android |
| Edge storage | microSD up to 256GB |
| Power supply | DC12V (voltage tolerance ±30%) / PoE(802.3af) |
| Power consumption | <9.6W |
| Working environment | -30°C ~ +60°C, ≤ 95% RH |
| Casing | Metal IP67 |
| Weight | 0.86kg |
| Dimensions | Ø90.4mm×244.1mm |



BCS-TIP5401IR-V-VI

Network Bullet Camera 4Mpx with motozoom lens 2.7~13.5mm

Junction box
BCS-AT5V



Junction box
BCS-AT135



Junction box
BCS-AT356

