


## BCS-L-DMIP-4x2MWSIR3-V-A

4 sensor network dome camera



- 4 sensor 1 / 2.8 "2Mpx Starvis PS CMOS camera
- Starlight technology
- H.265 / H.264 / MJPEG compression
- Support for two coding streams
- AWB, AGC, AES, BLC, HLC, WDR (140dB), Ultra DNR, ROI functions
- ICR mechanical infrared filter
- 30m infrared heater
- 2.7 ~ 12mm F1.8 motozoom lenses 4 × optical zoom
- Intelligent functions: line crossing, intrusion into the area
- Built-in web service, NVR compliance, support via CMS (BCS Manager), BCS mobile application (iOS, Android), P2P, Onvif
- 1 input and 1 alarm output
- 1 audio input and 1 audio output
- MicroSD card slot up to 256GB, RS485
- IP67, IK10 metal outdoor housing
- 24V AC, PoE + power supply

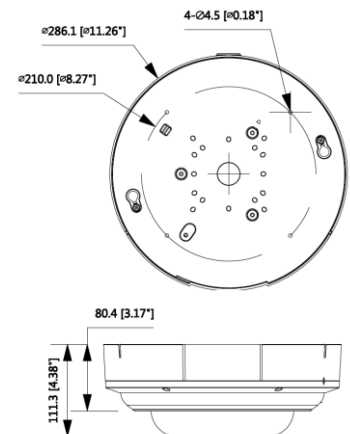

## BCS-L-DMIP-4x2MWSIR3-V-A

### 4 sensor network dome camera

Video system	IP
Scanning system	Progressive Scan
Sensor	4 × 1/2.8" 2Mpx Starvis CMOS
Pixels	1920(H)x1080(V)
RAM / ROM	1024MB/128MB
Min illumination	0.005Lux/F1.8( Color,1/3s,30IRE) 0.06Lux/1.8( Color,1/30s,30IRE) 0Lux/F1.8(IR on)
Lens	2.7~12mm motorized Max. Aperture F1.8
Viewing angle	H: 105° ~44°, V:54° ~25°
Optical / digital zoom	4x/16x
DORI (Detect/Observe/Recognize/Identify)	W: 45m/18m/9m/4m T: 99m/40m/20m/10m
White balance	(AWB) Auto/manual
Background compensation	BLC/HLC/WDR(140dB)
Shutter	Auto/Manual, 1/3(4)~1/100000s
Gain control	(AGC) Auto/manual
Noise reduction	Ultra 2D/3D DNR
Motion detection	4 areas
Privacy mask	4 areas
Focus	Auto/manual
Day Night	IR cut filter with auto-switch (ICR)
IR	30m
Video compression	H.265/H.264/H.264B/H.264H/MJPEG(sub stream)
Resolution	1080P(1920×1080)/1.3M(1280×960)/ 720P(1280×720)/D1(704×576/704×480)/ CIF(352×288/352×240)
Main stream	1080P(1~25/30fps)
Second stream	D1(1~25/30fps)
Bitrate	H.264: 32~8192Kbps H.265: 12~6144Kbps
Network connection	RJ-45 (100/1000Mbps)
Protocols	HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/IPv6; SNMP; QoS; UPnP; NTP
Audio	1 in / 1 out
Audio coding	G.711Mu/G.711A/ G.726/ AAC
Alarm	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12V
Users	Max 20 logged in
Mobile users	iOS, android
Memory card slot	microSD do 256GB
Power	AC24V/PoE+(802.3at) power consumption AC24V:9.9W 31.2W(IR) PoE: 10.6W
Working conditions	-30°C ~+60°C / 10~95%RH
Case	IP67 / IK10 metal
Dimensions and weight	286.1mm×111.3mm 2.7kg

