


## BCS-L-SP04G02G

Switch PoE 60W 4×PoE 1Gbps + 2×1Gbps uplink



- Intelligent PoE switch
- 4 PoE 1Gbps ports
- 2 RJ45 1Gbps uplink ports
- Standard IEEE802.3af / IEEE802.3at / Hi-PoE
- Power 60 W
- PoE watchdog
- Extended data transmission up to 250m at 10Mbps
- Operating conditions  $-10^{\circ}\text{C}$  to  $+55^{\circ}\text{C}$
- Metal housing
- 53V DC power supply

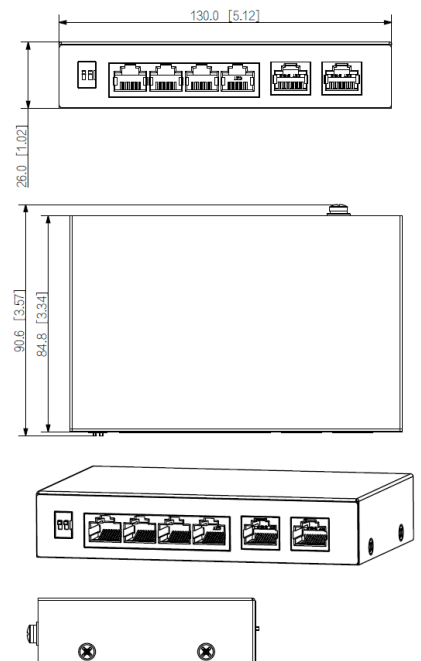

## BCS-L-SP04G02G

Switch PoE 60W 4×PoE 1Gbps + 2×1Gbps uplink

PoE ports	4 × RJ-45 1Gbps
Uplink ports	2 × RJ-45 1Gbps
Capacity	14 Gbps
Forwarding Packets	8.928 Mpps
Packet buffer memory	1 Mbit
MAC table	2K
Communication standard	IEEE802.3; IEEE802.3u; IEEE802.3X; IEEE 802.3ab
PoE standard	IEEE802.3af; IEEE802.3at; Hi-PoE
Standard mode	100m
Long distance mode	250m (10Mbps)
Power	60W (port 1 max. 60W Hi-PoE, port 2,3,4 max. 30W)
Pins	PoE/Hi-PoE: 1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-)
Protection	Electrostatic 8kV environment / 6kV contact; 2kV DM / 4kV surge protectors CM
Power	53V DC
Power consumption	Min. 0.96W Max. 60W
Working conditions	-10°C do +55°C; 5%–95% (RH)
Weight	0.3kg
Dimensions	130 mm × 85 mm × 26 mm

