

BCS-P-XVR0401-II


4 channel 1 HDD video recorder 5-system HDCVI/AHD/TVI/ANALOG/IP



Key features:

- Display and recording up to 4 channels and additional 2 IPC channels
- Recording 8Mpx@8fps, 1080P@15fps
- Support camera HDCVI/AHD/TVI@8Mpx, IP@8Mpx
- Max IP channels: 6
- Video compression H.265/H.264
- Maximum incoming bandwidth 40Mbps, outgoing 60Mbps
- Automatic recognize the system signal of camera
- Simultaneous output HDMI and VGA (1920×1080)
- Advanced video detection: motion detect, video loss, tampering
- Intelligent functions available only for selected IPC: face detect, intrusion, crossline, audio detect
- Support 1×SATA HDD up to 10TB
- 2×USB, 1 audio in and 1 audio out, RS485
- Web-service, support CMS (BCS Manager), mobile app BCS (iOS, android), P2P
- Power supply 12V DC

Dimensions:

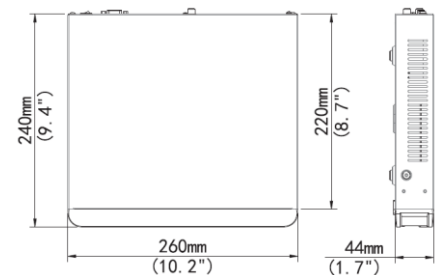

BCS-P-XVR0401-II

4 channel 1 HDD video recorder 5-system HDCVI/AHD/TVI/ANALOG/IP

Specification:

Processor	Embedded processor
Operating system	LINUX
System	HDCVI/AHD/TVI/CVBS/IP
Functionality	Real-time view, record, playback, backup, remote access
System control	Mouse, network
Channels	4+2 additional IPC channels
Video out	1xHDMI 1080P, 1xVGA 1080P, 1xBNC CVBS
Resolution	HDMI/VGA: 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Multi-screen display	HDMI/VGA: 1/4/6
Resolution	8Mpx Lite(1920x2160) / 5Mpx Lite(1296x1944) / 4Mpx Lite(1280x1440) / 3Mpx(2048x1536) / 1080P(1920x1080) / 960H(960x576) / 720P(1280x720) / D1(720x576) / CIF(352x288)
Max bandwidth	Incoming: 40Mbps, Outgoing: 60Mbps
Recording	Main stream: 8Mpx Lite@8fps (ch1), 5Mpx Lite@12fps, 4Mpx Lite@15fps, 3Mpx@15fps(ch1), 1080P@15fps, 960H/720P@30fps Second stream: D1/CIF@30fps
Video compression	H.265/H.264
Support camera	HDCVI: 8Mpx@15fps(ch1), 5Mpx@20fps, 4Mpx@30fps, 1080P@30fps, 720P@30fps AHD:8Mpx@15fps(ch1), 5Mpx@20fps, 4Mpx@30fps, 3Mpx@30fps(ch1), 1080P@30fps, 720P@60fps TVI:8Mpx@15fps(ch1), 5Mpx@20fps, 4Mpx@30fps, 3Mpx@30fps(ch1), 1080P@30fps, 720P@60fps IP: 8Mpx CVBS
Playback synchronous	4x1080P
Backup	USB device / network download
Network	1 Port RJ-45 (10/100M)
Remote users	128
Compatibility	Onvif
Video detect	Motion detect, video loss, tampering
Protocols	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP,UDP, SMTP, NTP, DHCP, DNS, PPPoE, P2P
HDD	1xSATA max 10TB
Interfaces	2xUSB2.0, RS485
Audio	1 in / 1 out
Power supply	12V DC, Power consumption < 8W (without HDD)
Working environment	-10°C ~+55°C / 10~90%RH
Dimensions, weight	Casing 1U 260x240x44mm (WxDxH) 1.1kg(without HDD)

