


BCS-P-625R3SA

5Mpx Fisheye Fixed Dome Network Camera




Key features:

- Sensor 1/2.8" 5Mpx PS CMOS
- Compression H.265/H.264/MJPEG
- Triple video streaming
- IR-cut filter with auto switch (ICR)
- Digital Noise Reduction 2D/3D DNR
- Web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P
- Wide dynamic range WDR 120dB
- Functions AWB, AGC, BLC, HLC, ROI, Defog
- Fisheye fixed lens 1.4mm F2.0 with angle H:360°
- IR Led distance up to 10m
- Protection IP66, IK10
- Edge storage microSD up to 256GB
- Working environment -40°C ~ +60°C
- Built-in microphone
- 1 alarm in / 1 alarm out
- 1 audio in / 1 audio out
- Power supply DC12V (voltage range $\pm 25\%$) / PoE

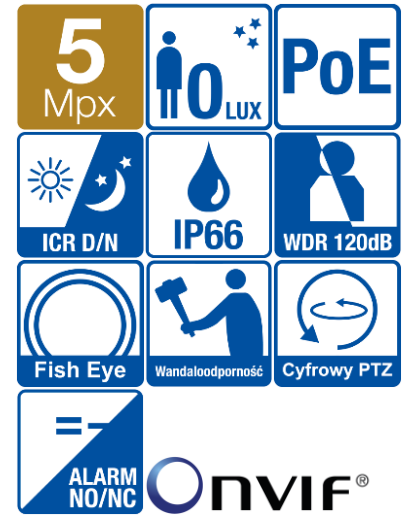

Dimensions:

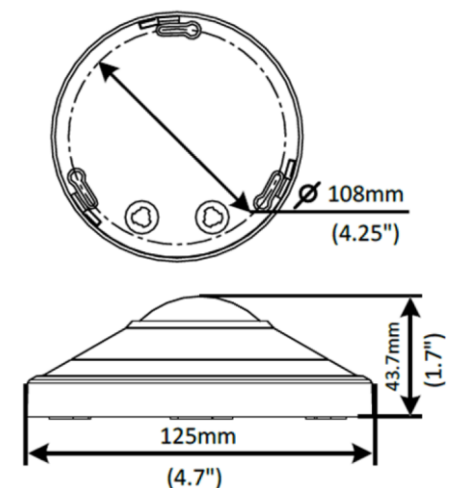

BCS-P-625R3SA

5Mpx Fisheye Fixed Dome Network Camera

Specification:

Scanning system	Progressive Scan
System	IP
Sensor	1/2.8" 5Mpx PS CMOS
Pixels	2592(H) × 1944(V)
Min. illumination	0.01Lux/F2.0 (Color, AGC On), 0Lux/F1.4(B/W, IR On)
S/N ratio	> 55dB
White balance	(AWB) Auto/manual
Lens	Fisheye 1.4mm F2.0 angle H:360°
DORI(Detect/Observe/Recognize/Identify)	31m/13m/6m/3m
Backlight compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1/1~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D NR - regulation
Motion detect	4 areas
Privacy masking	8 areas
Image Rotation	Mirror, flip 180°
Focus control	Auto
Day/night	IR-cut filter with auto switch (ICR)
IR distance	Up to 10m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	5M(2592×1944) / 1080P(1920×1080) / 720P(1280×720) / D1(720×576) / (640×360) / 2CIF(704×288) / CIF(352×288)
Main stream	5M(2592×1944)@25/30fps
Second stream	1080P(1920×1080) / 720P(1280×720) / (640×360)@25/30fps
Third stream	D1(720×576) / (640×360) / 2CIF(704×288) / CIF(352×288)@25/30fps
Network	RJ-45 (10/100Base-T)
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
Compatibility	ONVIF (Profile S, Profile G, Profile T), API
Users	Max 10 logged in
Mobile users	iOS, android
Audio	1 audio in / 1 audio out, built-in microphone
Audio compression	G.711A/ G.711U
Alarm	1 alarm in / 1 alarm out
Edge storage	microSD up to 256GB
Power supply	DC12V (voltage range ±25%) / PoE(802.3af)
Power consumption	<8.9W
Working environment	-40°C ~ +60°C, <95% RH
Casing	Metal/plastic IP66, IK10
Weight	0.39kg
Dimensions	Φ125mm×43.7mm

