


# BCS-P-262R3WSA/BCS-P-262R3WSA-G



2 Mpx dome camera with MOTOZOOM 2.8-12mm lens

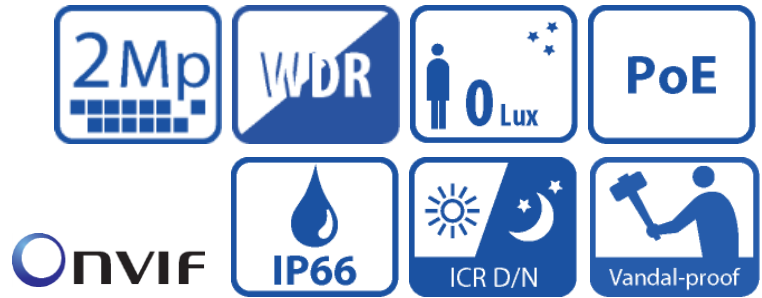

## Key features

- 1 / 2.9" 2Mpx CMOS sensor
  - H.265 / H.264 / MJPEG encoding
  - Support for three coding streams
  - Mechanical infrared filter
  - 2D / 3D digital noise reduction
  - Built-in WEB Server, compliance with BCS-NVR-Point, CMS (BCS Manager), P2P
  - Extended WDR function (120dB)
  - Corridor function - changing the aspect ratio to widen the viewing angle of the camera
  - ROI function - area of interest in the image, Defog function
  - Smart functions: line crossing, intrusion into the area, face detection, people counting, audio detection
  - 2.8-12mm F1.6 motozoom lens with wide 90° angle of view - 28° tele
  - Infrared with a range of up to 30m
  - Outdoor housing IP66, IK10
  - Support for MicroSD cards up to 128GB
  - Working temperature -40 °C ~ + 60 °C
  - DC12V and PoE power supply (power tolerance ± 25%)
  - 12VDC power output (when powering the POE camera)
  - Video service output
- BCS-P-262R3WSA-G - Dark housing

## Specification

Model		BCS-P-262R3WSA(-G)
Scanning system		Progressive Scan
Sensor		1/2.9" 2Mpx CMOS
Pixels		1920(H)x1080(V)
Min illumination		Color: 0.02Lux (F1.6, AGC) B/W: 0Lux (IR)
S/N ratio		> 52dB
White balance		Auto/manual
General	Lens	Motozoom 2.8-12mm F1.6
	Backlight compensation	(BLC / HLC / WDR)
	Shutter	Auto/manual (1/6-1/8000s),
	Gain control	(AGC) Auto/manual
	Noise reduction (NR)	2D/3D
Advanced	Motion detect	4
	Privacy masking	4
	Image rotate	Mirror, Flip 90°, 180°, 270°
	Focus	Auto/manual
	Day/night	ICR
Video	Compression	H.265 / H.264 / MJPEG
	Resolution	1080P(1920x1080) / 720P(1280x720) / D1(720x576) / 2CIF(704x288) / CIF(352x288)
	Main stream	1080P(1-30kl/s)
	Second stream	720P/D1/2CIF/CIF(1-25kl/s)
	Third stream	D1/2CIF/CIF(1-25kl/s)
Network	Bitrate	H.264: 128 ~ 16384Kbps,
	Ethernet	RJ-45 (10/100Base-T)
	Protocols	L2TP,IPv4,IPv6,IGMP,ICMP,ARP,TCP,UDP, DHCP,PPPoE,RTP,RTSP,QoS,DNS,DDNS,NT P,FTP,UPnP,HTTP,SMTP,SNMP,SIP,P2P
	Compatibility	ONVIF Ver. 2.4, API
	Mobile	Android, iOS
Users	10	
Edge storage	microSD do 128GB	
Alarm/audio	1/1, 1/1	
Power supply	12VDC / POE (IEEE802.3af)	
Power consumption	< 7.2 W	
Working environment	-40°C ~ +60°C, IP66, IK10	
Weight	0,75kg	
Dimensions and weight	Φ148 x 111.3 mm	

## Dimensions

