

BCS-P-5692RSAI


12Mpx 22x IR Network PTZ Dome Camera



Key features

- Sensor 1/1.7" 12Mpx PS CMOS
- Video compression H.265 / H.264 / MJPEG
- Triple video streaming
- 20fps at 12Mpx (4000x3000), 30fps at 8Mpx(3840x2160)
- IR-cut filter with auto switch (ICR)
- Digital Noise Reduction 2D/3D
- Web-service, support BCS-NVR-Point, CMS(BCS Manager), mobile app BCS(iOS, android), P2P
- EIS – electronic image stabilization
- Function Defog
- Pan speed 300°/s in preset
- Lens 6.5-143mm with optical zoom 22x angle of view wide 56.7° - tele 3.07°
- IR Leds distance up to 250m with regulation
- High precision positioning
- Intelligent functions: cross line, intrusion, face detect, people counting, auto-tracking, audio detect
- Automatic functions: 255 presets, 16 tour (with 32 presets), 16 pattern
- In/Out- Alarm: 2/1, Audio: 1/1
- RS485, video out BNC
- Protection IP66
- Power supply AC24V/DC24V (±25%)
- Working environment (-45°C ~ +70°C)
- 6 KV surge protection designed for network interface

Dimensions

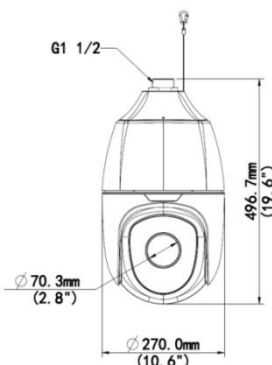

Specification

Model		BCS-P-5692RSAI	
Scanning system		Progressive Scan	
Sensor		1/1.7" 12Mpx CMOS	
Pixels		4000(H)x3000(V)	
Min. illumination		Color: 0.06Lux (F1.5 AGC On) B/W: 0lux (IR On)	
S/N ratio		> 55dB	
White balance		(AWB) Auto/manual	
Basic functions	Lens	6.5~143mm (22x opt. zoom) F1.5~F3.4	
	Backlight compensation	Off/On (BLC / HLC / D-WDR)	
	Shutter	Auto/manual (1/6 ~ 1/100000s),	
	Gain control	(AGC) Auto/manual	
	Noise reduction	2D/3D Of/On - regulation	
Additional functions	Motion Detection	On/Off (4 areas, sensitivity, threshold, position, size), grid	
	Privacy masking	On/Off (4 areas, position, size)	
	Rotation	Mirror, Flip 90°, 180°, 270°	
	Focus	Auto/manual - regulation	
	Day/night	IR-cut filter with auto switch (ICR)	
Video functions	Compression	H.265 / H.264 / MJPEG	
	Resolution	12M(4000x3000) / 8M(3840x2160) / 2M(1920x1080) / 720P(1280x720) / D1(704x576) / 2CIF(704x288) / CIF(352x288)	
	Stream	main	12M(1~20fps)/8M(1~30fps)/2M(1~30fps)
		second	2M/720P/D1/2CIF/CIF(1 ~ 30fps)
		triple	D1/2CIF/CIF(1 ~ 30fps)
Bitrate	H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 12288Kbps		
PTZ Functions	Pan/Tilt Range	360° (endless), -15°~+90° (auto flip)	
	Pan/Tilt Speed	PAN: 0.1°/s ~ 240°/s (300°/s in preset) TILT: 0.1°/s ~ 160°/s (240°/s in preset)	
	Pan/Tilt Speed	255 presets; 16 tour (with 32 presets); 16 pattern up to 15 min	
Network	Ethernet	RJ-45 (10/100Base-T)	
	Protocols	L2TP,IPv4,IPv6,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTSP,RTSP,QoS,DNS,DDNS,NTP,FTP,UPnP,HTTP,HTTPS,SMTP,SNMP,SIP,802.1x, P2P	
	Compatibility	ONVIF Ver. 2.4, API	
	Mobile	Android, iOS	
	Users	Max 10 logged in	
Edge storage		microSD do 128GB	
In/Out		Alarm:2/1 Audio:1/1(G.711A,G.711U)	
Power supply		24VAC/24VDC (±25%)	
Power consumption		Max 56W	
Working environment		-45°C ~ +70°C IP66	
Weight		9.69kg	
Dimensions		Ø270 x 496.7 mm	