


## BCS-P-TIP22FSR4-Ai1(-G)

2Mpx bullet IP camera with 2.8mm lens



- 1 / 2.8 "2Mpx PS CMOS sensor
- H.265 + / H.264 + / MJPEG encoding
- Support for three coding streams
- ICR mechanical infrared filter
- AWB, AGC, BLC, HLC, ROI, Defog, WDR (120dB), 2D / 3D NR functions
- Motion detection, privacy masks
- Intelligent functions: perimeter protection, line crossing, intrusion into the area
- Infrared with a range of up to 40m
- 2.8mm F1.6 fixed focal length lens
- IP67 metal outdoor housing
- Built-in microphone
- 256GB microSD memory card slot
- Built-in web service, compliance with BCS-NVR, CMS (BCS Manager), BCS mobile application (iOS, android), P2P, Onvif
- DC12V / PoE 802.3af power supply

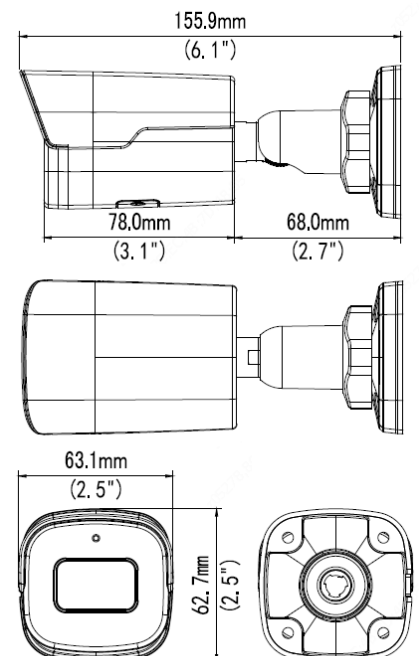

## BCS-P-TIP22FSR4-Ai1(-G)

2Mpx bullet IP camera with 2.8mm lens

Video system	IP
Scanning system	Progressive Scan
Sensor	1/2.8" 2Mpx CMOS
Pixels	1920(H) × 1080(V)
Tenderness	0.001Lux/F1.6 (Color, AG) 0Lux(B/W, IR)
S / N ratio	> 52dB
Lens	2.8mm F1.6
Focus	Fixed
Viewing angle	H: 106.7°, V: 57.1°
DORI	Detect 43m / Observe 17m / Recognize 9m / Identify 4m
White balance	(AWB) Auto/manual
Background	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D NR
Motion detection	4 areas
Privacy zone	4 areas
Image rotation	Mirror, flip
Day / night function	IR cut filter with auto-switch ICR
Infrared range	40m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	1080P(1920×1080) / 720P(1280×720) / D1(704×576) / (640×360) / 2CIF(704×288) / CIF(352×288)
Main stream	1080P/720P@25/30fps
Second stream	1080P/720P/D1/(640×360)/2CIF/CIF@30fps
Third stream	D1/(640×360)/2CIF/CIF@30fps
Audio	Built-in microphone
Audio compression	G.711
Network connection	RJ-45 (10/100Mbps)
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, P2P
Compatibility	ONVIF(S/G/T)
Users	Max 10 logged in
Mobile users	iOS, android
Power	DC12V (±25%) / PoE(802.3af)
Power consumption	<6W
Working conditions	-30°C ~ +60°C, 10%~90% RH
Case	Metal, IP67
Weight	0.42kg
Dimensions	156×63mm



## BCS-P-TIP22FSR4-Ai1(-G)

2Mpx bullet IP camera with 2.8mm lens

Junction box  
BCS-P-A71(-G)



Junction box  
BCS-P-A61(-G)

