

BCS-P-464R3WSA(-G)

Network IR bullet camera 4Mpx with motozoom 2.8~12mm




Key features:

- Sensor 1/3" 4Mpx PS CMOS
- Compression H.265+/H.264+/MJPEG
- Triple stream coding
- IR-cut filter with auto switch (ICR)
- Digital Noise Reduction 2D/3D
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), P2P
- Functions AWB, AGC, BLC, HLC, ROI, Defog, ANR
- Wide Dynamic Range WDR(120dB)
- Intelligent functions: crossline, intrusion, abandoned/missing object, people counting, face detect, audio detect
- Motion detect, privacy masking
- IR distance up to 30m
- Motozoom lens 2.8~12mm
- Outside metal casing with protection IP67
- Edge storage microSD up to 256GB
- 1 audio in / 1 audio out
- 1 alarm in / 1 alarm out
- Working environment -35°C ~ +60°C
- Power supply DC12V (voltage range $\pm 25\%$) / PoE



Dimensions:

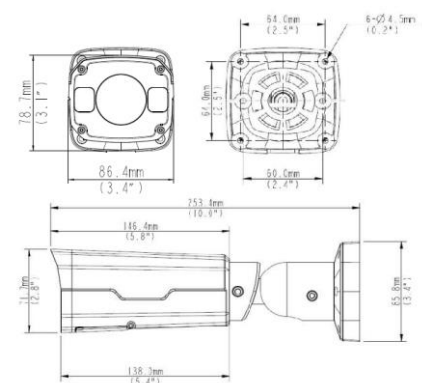

BCS-P-464R3WSA(-G)

Network IR bullet camera 4Mpx with motozoom 2.8~12mm

Specification:

System video	IP
System scanning	Progressive Scan
Sensor	1/3" 4Mpx CMOS
Pixels	2592(H) × 1520(V)
Minimum illumination	0.005Lux/F1.4 (Color, AGC On); 0Lux(B/W, IR On)
S/N ratio	> 52dB
Lens	2.8~12mm F1.4; angle of view H: 91°~27°, V: 54.4°~13.7°
DORI (Detect/Observe/Recognize/Identify)	2.8mm: 63m/25m/12m/6m 12mm: 270m/108m/54m/27m
White balance	(AWB) Auto/manual
Backlight compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D NR - regulation
Motion detect	4 areas (regulation: size, position, sensitivity, threshold)
Privacy masking	8 areas (regulation: size, position)
Image rotate	Mirror, flip
Focus	Auto/manual
Day/night	IR-cut filter with auto switch (ICR)
IR range	Up to 30m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	4M(2592×1520)(2560×1440) / 3M(2048×1520) / 1080P(1920×1080) / 720P(1280×720) / D1(704×576) / (640×360) / 2CIF(704×288) / CIF(352×288)
Main stream	4M(2592×1520)@20fps; 4M(2560×1440)@25fps, 3M/1080P@30fps
Second stream	720P/D1/(640×360)/2CIF/CIF@30fps
Triple stream	D1/(640×360)/2CIF/CIF@30fps
Audio	1 audio in / 1 audio out
Audio compression	G.711A / G.711U
Network	RJ-45 (10M/100MBase-TX)
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, P2P
Compatibility	ONVIF(Profile S, Profile G, Profile T), API
Users	Max 10 logged in
Mobile users	iOS, android
Alarm	1 alarm in / 1 alarm out
Edge storage	microSD up to 256GB
Power supply	DC12V (voltage range ±25%) / PoE(IEEE802.3 af)
Power consumption	<9W
Working environment	-35°C ~ +60°C, 10%~90% RH
Casing	Metal, protection IP67
Weight	1kg
Dimensions	253×86×78mm

