


## BCS-P-465R3WSA(-G)


Network bullet camera IP 5Mpx with motozoom lens 2.7~13.5mm

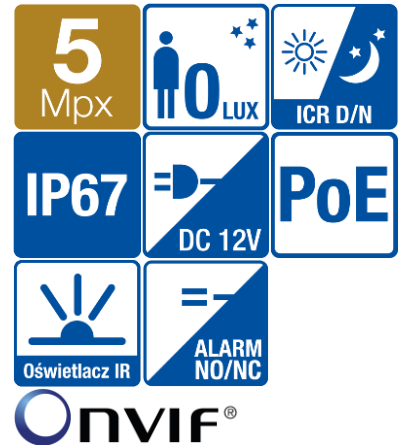

### Key features:

- Sensor 1/2.7" 5Mpx PS CMOS
- Compression H.265+/H.264+/MJPEG
- Resolution 2592×1944@25fps
- Triple stream coding
- IR cut filter with auto switch ICR
- Digital Noise Reduction 2D/3D
- Built-in Web service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(android, iOS), P2P
- Functions AWB, AGC, AES, BLC, HLC, ROI, Defog
- Wide Dynamic Range WDR(120dB)
- Motion detect, privacy masking
- Intelligent functions: crossline, intrusion, abandoned/missing object, people counting, face detect, audio detect
- IR range up to 50m
- Motozoom lens 2.7~13.5mm F1.2
- Outside metal casing IP67
- Edge storage microSD up to 256GB
- 1 audio in / 1 audio out
- 1 alarm in / 1 alarm out
- Working environment -35°C ~ +60°C
- Power supply DC12V (±25%) / PoE

### Dimensions:

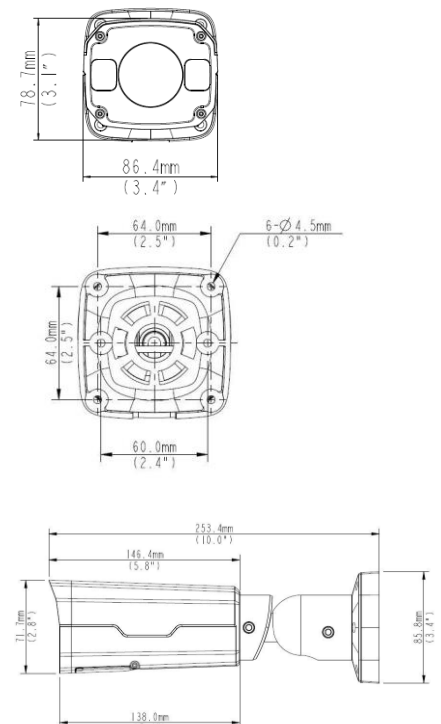

## BCS-P-465R3WSA(-G)

Network bullet camera IP 5Mpx with motozoom lens 2.7~13.5mm

### Specification:

System video	IP
Scanning System	Progressive Scan
Sensor	1/2.7" 5Mpx CMOS
Pixels	2592(H) × 1944(V)
Minimum illumination	0.002Lux/F1.2 (Color, AGC On) 0Lux(B/W, IR On)
S/N ratio	> 52dB
Lens	Motozoom 2.7~13.5mm, angle of view H: 93.3°~28.5°, V:88°~16.4°
DORI(Detect/Observe/Recognize/Identify)	2.7mm: 60m/24m/12m/6m 13.5mm: 303m/121m/60m/30m
White balance	(AWB) Auto/manual
Backlight compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D NR - regulation
Motion detect	4 areas (regulation: size, position, sensitivity, threshold)
Privacy masking	8 areas (regulation: size, position)
Image rotate	Mirror, flip
Focus	Auto/manual
Day/night	IR cut filter with auto-switch ICR
IR distance	Up to 50m
Compression video	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	5M(2592×1944) / 4M(2560×1440) / 3M(2048×1520) / 1080P(1920×1080) / 720P(1280×720) / D1(704×576) / (640×360) / 2CIF(704×288) / CIF(352×288)
Main stream	5M@20/25fps; 4M/3M@25/30fps; 1080P@25/30/50/60fps
Second stream	1080P/720P/D1/(640×360)/2CIF/CIF@25fps
Third stream	D1/(640×360)/2CIF/CIF@25fps
Network	RJ-45 (10M/100M Base-TX)
Audio	1 in / 1 out
Compression audio	G.711A/G.711U
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, P2P
Compatibility	ONVIF(Profile S, Profile G, Profile T), API
Users	Max 10 logged in
Mobile users	iOS, android
Edge storage	microSD up to 256GB
Alarm	1 in / 1 out
Power supply	DC12V (tolerance ±25%) / PoE(IEEE802.3 af)
Power consumption	<10W
Working environment	-40°C ~ +60°C, 10%~95% RH
Casing	Metal, IP67
Weight	1kg
Dimensions	253.4mm × 86mm × 71.7mm

