


BCS-P-NVR0401-4KE-4P-III

4 channel 1 HDD IP network video recorder with PoE



- Display and recording of up to 4 IP cameras at a maximum resolution of 4K
- H.265 + / H265 / H.264 + / H.264 compression
- Max bandwidth for incoming 64Mbps, outgoing 48Mbps
- Simultaneous video out HDMI (3840 × 2160) and VGA (1920 × 1080)
- Advanced video detection: motion detection, blackout, image loss
- Support for intelligent functions from cameras: face detection, intrusion into the area, line crossing, people counting
- Built-in 4-port PoE 100Mbps 54W switch
- Support for 1 SATA drive up to 6TB
- 1RJ × 45 100Mbps, 2 × USB, 1 audio output
- Built-in web server, support via CMS (BCS Manager), BCS mobile application (iOS, android), P2P, Onvif
- 48V DC power supply

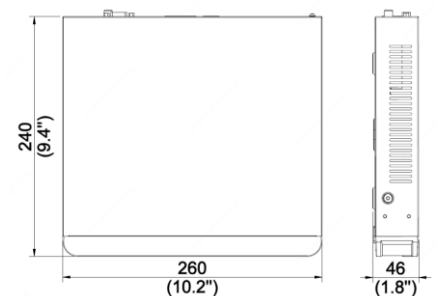

BCS-P-NVR0401-4KE-4P-III

4 channel 1 HDD IP network video recorder with PoE

Processor	Built-in high-performance processor
Operating system	LINUX
System functionality	Live View, Record, Playback, Archiving and Remote Access
System control	Mouse, network
IP channels	4
Monitor outputs	1×HDMI 4K, 1×VGA 1080P
Display resolutions	VGA: 1920×1080/60Hz, 1920×1080/50Hz, 1600×1200/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz HDMI: 4K(3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Display split	1/4 corridor mode: 3/4
Recording resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Maximum bandwidth	Incoming: 64Mbps, outgoing: 48Mbps
Display performance	1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 4 x 1080p@30
Video compression	H.265+/H265/H.264+/H.264
Synchronous playback	4 channels
Data archivization	flash drive (USB) / network download
Network interface	1 Port RJ-45 (10/100Mbps)
Audio	1 out
Remote connections	128
Compatibility	Onvif
Supported protocols	P2P, UPnP, NTP, DHCP, PPPoE
Hard drive	1×SATA max 6TB
Interfaces	2×USB2.0
PoE	(IEEE 802.3af/at) 100Mbps Maximum power for a single port: 30W Maximum total power: 54W (13.5W for port)
Power	48V DC, Power consumption < 9W (without HDD)
Working conditions	-10°C ~+55°C / 10~90%RH
Dimensions and weight	260×240×46mm (W×D×H) 1kg(without HDD)

