


## BCS-P-NVR0801-4K-8P-II

8 channel 1 HDD Network Video Recorder with PoE switch



- Display and recording 8 IPC with max resolution 4K
- Compression H.265+/H265/H.264+/H.264
- Max incoming bandwidth 80Mbps, outgoing 64Mbps
- Video out HDMI(3840×2160) and VGA(1920×1080)
- Advanced video detection: motion detect, video loss, tampering
- Intelligent functions: face detect, intrusion, crossline audio detect, missing/abandoned object
- Built-in 8 port switch PoE 100Mbps 108W
- Support 1 HDD SATA up to 6TB
- 1 audio in / 1 audio out
- 1×RJ45 100Mbps, 2×USB
- Web-service, support CMS (BCS Manager), mobile app BCS (iOS, android), P2P, Onvif
- Power supply 52V DC

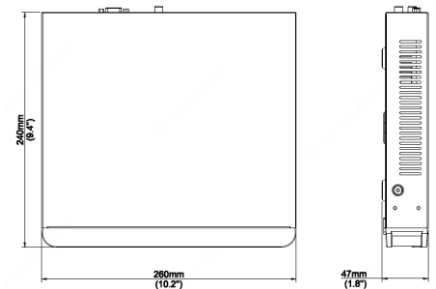

## BCS-P-NVR0801-4K-8P-II

8 channel 1 HDD Network Video Recorder with PoE switch

Processor	Embedded processor
Operating system	LINUX
Functionality	Real-time view, record, playback, backup, network access
System control	Mouse, network
IP channels	8
Video out	1xHDMI 4K, 1xVGA 1080P
Display	VGA: 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI: 4K(3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Multi-screen display	1/4/6/8 Corridor mode: 3/4/5/7/9
Record resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Bandwidth	Incoming: 80Mbps, Outgoing: 64Mbps
Decoding	2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30
Video compression	H.265+/H265/H.264+/H.264
Playback	1/4/8
Backup	Flash drive (USB) / Network download
Network	1 Port RJ-45 (10/100Mbps)
Audio	1/1
Remote access	128
Compatibility	Onvif
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
HDD	1xSATA max 6TB
Interfaces	1xUSB3.0, 1xUSB2.0
PoE(IEEE 802.3af/at) 100Mbps	Max power for single port: 30W Max total power: 108W (13.5W for port)
Power supply	52V DC, Power consumption < 8W (without HDD)
Working environment	-10°C ~+55°C / 10~90%RH
Dimensions and weight	260x240x47mm (WxDxH) 1kg(without HDD)

