



BCS-P-NVR0801-E-II

8 channel 1 HDD Network Video Recorder IP

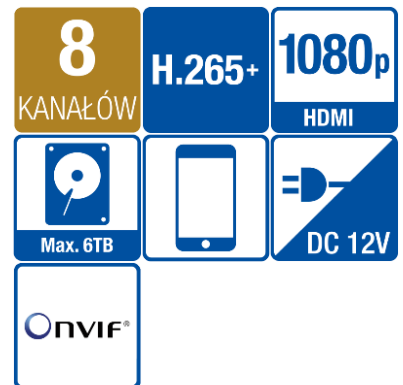

- Support 8 IPC with maximum resolution 6Mpx
- Compression H.265+/H265/H.264+/H.264
- Max 50Mbps incoming, 40Mbps outgoing bandwidth
- Simultaneous video out HDMI(1920×1080) and VGA(1920×1080)
- Advanced video detection: motion detect, video loss, tampering
- Intelligent functions: face detect, intrusion, crossline, audio detect
- Support 1 HDD SATA up to 6TB
- 2×USB
- Audio output
- Web-service, support CMS (BCS Manager), mobile app BCS (iOS, android), P2P
- Power supply 12V DC

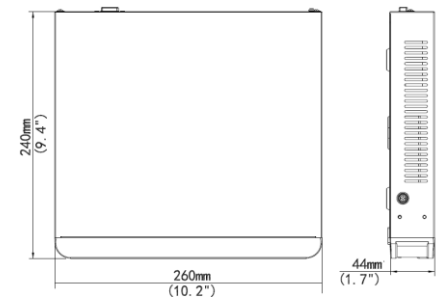

BCS-P-NVR0801-E-II

8 channel 1 HDD Network Video Recorder IP

Processor	Embedded processor
Operating system	LINUX
Functionality	Real-time view, record, playback, backup, remote access
System control	Mouse, network
IP channels	8
Video out	1xHDMI 1080P, 1xVGA 1080P
Display	HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Multi-screen display	HDMI/VGA: 1/4/8 Corridor mode: 3/4/5/7/9
Record resolution	6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Bandwidth	Incoming: 50Mbps, Outgoing: 40Mbps
Limits	1 x 6MP@20, 1 x 5MP@30, 2 x 4MP@25, 2 x 3MP@30, 4 x 1080p@25, 8 x 960p@25, 8 x 720p@30
Video compression	H.265+/H265/H.264+/H.264
Synchronous playback	1/4/8
Backup	Flash drive(USB) / Network download
Network interface	1 Port RJ-45 (10/100M)
Remote access	128
Compatibility	Onvif
Protocols	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, FTP, NTP, DHCP, DNS, PPPoE, P2P
HDD drive	1xSATA max 6TB
Interfaces	2xUSB2.0
Power supply	12V DC, Power consumption <9W (without HDD)
Working environment	-10°C ~+55°C / 10~90%RH
Dimensions and weight	1U 260x240x44mm (WxDxH) 1kg(without HDD)

