



**BCS-DMQ1503IR3-G(-B)(II)**

5Mpx HDCVI / AHD / TVI / ANALOG dome camera with 2.8mm lens

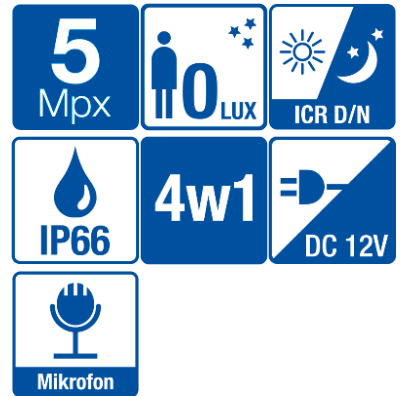

- 1 / 2.8 "5Mpx SONY STARVIS CMOS sensor
- Resolution 2560 × 1944 @ 20fps
- 4in1 camera: HDCVI / AHD / TVI / ANALOG
- ICR mechanical infrared filter
- AGC, AWB, AES, BLC, HLC, DWDR, 2D NR functions
- On-Screen Display (OSD) menu
- 2.8mm fixed focal length lens
- Infrared with a range of up to 30m
- Built-in microphone
- System changeover switch
- IP66 outdoor housing
- Operating conditions -30 ° C ~ + 60 ° C
- 12V DC power supply

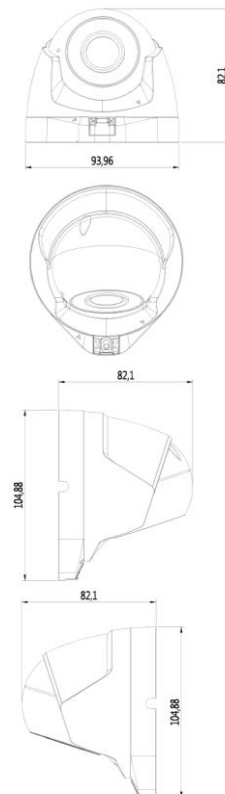

## BCS-DMQ1503IR3-G(-B)(II)

5Mpx HDCVI / AHD / TVI / ANALOG dome camera with 2.8mm lens

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.8" 5Mpx SONY STARVIS CMOS, IMX335+ FH8538M
Pixels	2560(H) × 1944(V)
Resolution	5M(2560×1944)@20fps / 4M(2560×1440)@25/30fps / 1080P(1920×1080)@25/30fps
Video output	1 V p-p, composite, BNC, 75 Ohm
Min illumination	Color: 0.01Lux@F1.2(AGC) B/W: 0Lux (IR)
White balance	(AWB) Auto/manual
Lens	2.8mm F1.2
Background compensation	BLC / HLC / DWDR
Shutter	Auto/manual (1/25~1/50000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D NR
Day / night function	ICR
Infrared	30m
Power	12V DC (±10%)
Power consumption	<8W
Working conditions	-30°C ~ +60°C
Case	Metal IP66
Weight	0.3kg
Dimensions	94mm(105mm) × 82mm

## BCS-DMQ1503IR3-G(-B)(II)

5Mpx HDCVI / AHD / TVI / ANALOG dome camera with 2.8mm lens

Adapter  
BCS-ADMQ1

