



## BCS-DMQ3803IR3-G(-B)(II)

8Mpx HDCVI / AHD / TVI / ANALOG dome camera with motozoom lens

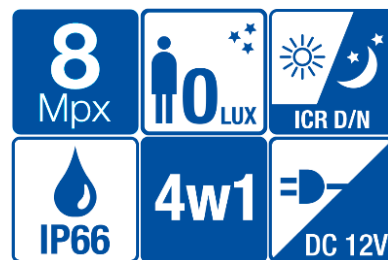

- 1 / 1.8 "8Mpx SONY CMOS sensor
- Resolution 3840 × 2160 @ 15fps
- 4in1 camera: HDCVI / AHD / TVI / ANALOG
- ICR mechanical infrared filter
- AGC, AWB, AES, BLC, HLC, DWDR, 2D / 3D DNR functions
- On-Screen Display (OSD) menu
- 3.6-10mm AF motozoom lens
- Infrared with a range of up to 40m
- System changeover switch
- IP66 outdoor housing
- Operating conditions -30 ° C ~ + 60 ° C
- 12V DC power supply

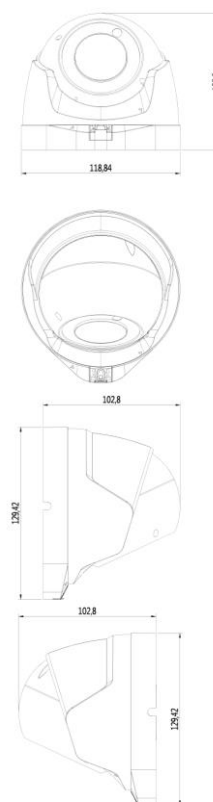

## BCS-DMQ3803IR3-G(-B)(II)

8Mpx HDCVI / AHD / TVI / ANALOG dome camera with motozoom lens

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/1.8" 8Mpx SONY CMOS, OS08A10+NVP2481H
Pixels	3840(H) × 2160(V)
Resolution	8MP:HDTVI/CVI/AHD:15fps@3840 x 2160P, CVBS:25/30fps@960H
Video output	1 V p-p, composite, BNC, 75 Ohm
Min. illumination	Color: 0.01Lux@F1.2(AGC) B/W: 0Lux (IR)
White balance	(AWB) Auto/manual
Lens	Motozoom 3.6-10mm AF F1.2
Background compensation	BLC / HLC / DWDR
Shutter	Auto/manual (1/25~1/50000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D DNR
Day / night function	IR cut filter with auto-switch ICR
Infrared	40m
Power supply	12V DC (±10%)
Power consumption	<10W
Working conditions	-30°C ~ +60°C
Case	Metal IP66
Weight	0.4kg
Dimensions	119mm(130mm) × 103mm

## **BCS-DMQ3803IR3-G(-B)(II)**

8Mpx HDCVI / AHD / TVI / ANALOG dome camera with motozoom lens

Junction box  
BCS-ADMQ3

