



BCS-DMQE1200IR3-G(-B)(II)

2Mpx HDCVI / AHD / TVI / ANALOG dome camera with 2.8mm lens

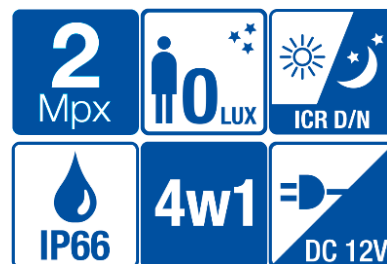

- 1 / 2.8 "2Mpx SONY CMOS sensor
- Resolution 1920 × 1080 @ 30fps
- 4in1 camera: HDCVI / AHD / TVI / ANALOG
- ICR mechanical infrared filter
- AGC, AWB, AES, BLC, HLC, DWDR, 2D / 3D NR function
- On-Screen Display (OSD) menu
- 2.8mm fixed focal length lens
- Infrared with a range of up to 30m
- System changeover switch
- IP66 outdoor housing
- Operating conditions -30 ° C ~ + 60 ° C
- 12V DC power supply

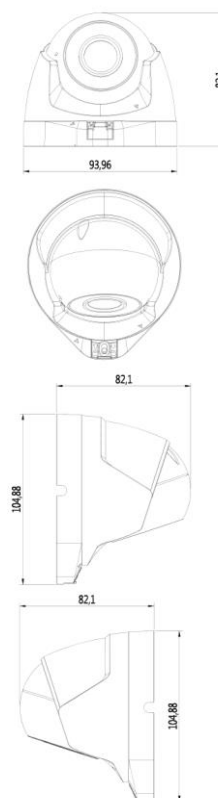

BCS-DMQE1200IR3-G(-B)(II)

2Mpx HDCVI / AHD / TVI / ANALOG dome camera with 2.8mm lens

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.9" 2Mpx SONY CMOS, IMX323+FH8536H
Pixels	1920(H) × 1080(V)
Resolution	1080P(1920×1080)@25/30fps
Video output	1 V p-p, composite, BNC, 75 Ohm
Min illumination	Kolor: 0.01Lux@F1.2(AGC) B/W: 0Lux (IR)
White balance	(AWB) Auto/manual
Lens	2.8mm F1.2
Background compensation	BLC / HLC / DWDR
Shutter	Auto/manual (1/25~1/50000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D NR
Day / night function	ICR
Infrared	30m
Power	12V DC (±10%)
Power consumption	<8W
Working conditions	-30°C ~ +60°C
Case	Metal IP66
Weight	0.3kg
Dimensions	94mm(105mm) × 82mm

BCS-DMQE1200IR3-G(-B)(II)

2Mpx HDCVI / AHD / TVI / ANALOG dome camera with 2.8mm lens

Adapter
BCS-ADMQ1

