


## BCS-DMQE1500IR3-G(-B)(II)

5Mpx HDCVI / AHD / TVI / ANALOG dome camera with 3.6mm lens



- Sensor 1 / 2.9" 5Mpx SONY CMOS
- Resolution 2560 × 1944 @ 20fps
- 4in1 camera: HDCVI / AHD / TVI / ANALOG
- ICR mechanical infrared filter
- AGC, AWB, AES, BLC, HLC, DWDR, 2D NR functions
- On-Screen Display (OSD) menu
- 3.6mm fixed focal length lens
- Infrared with a range of up to 30m
- System changeover switch
- IP66 outdoor housing
- Operating conditions -30 ° C ~ + 60 ° C
- 12V DC power supply

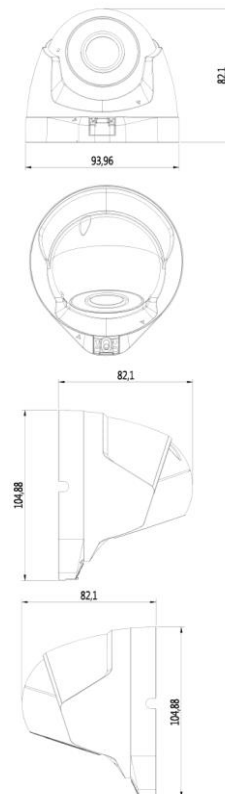

**BCS-DMQE1500IR3-G(-B)(II)**

5Mpx HDCVI / AHD / TVI / ANALOG dome camera with 3.6mm lens

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.9" 5Mpx SONY CMOS, IMX326, JX-K03+FH8538M
Pixels	2560(H) × 1944(V)
Resolution	5M(2560×1944)@20fps / 4M(2560×1440) @25/30fps /
Video output	1 V p-p, composite, BNC, 75 Ohm
Min. illumination	Color: 0.02Lux@F1.2(AGC On) B/W: 0Lux (IR On)
White balance	(AWB) Auto/manual
Lens	3.6mm F1.2
Backlight compensation	BLC / HLC / DWDR
Shutter	Auto/manual (1/25~1/50000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D NR
Day / night function	IR cut filter with auto-switch
IR range	30m
Power	12V DC (±10%)
Power consumption	<8W
Working conditions	-30°C ~ +60°C
Casing	Metal IP66
Weight	0.3kg
Dimensions	94mm(105mm) × 82mm

## BCS-DMQE1500IR3-G(-B)(II)

5Mpx HDCVI / AHD / TVI / ANALOG dome camera with 3.6mm lens

Junction box  
BCS-ADMQ1

