


BCS-DMQE3202IR3(-B)


2Mpx IR eyeball camera HDCVI/AHD/TVI/ANALOG with motozoom lens

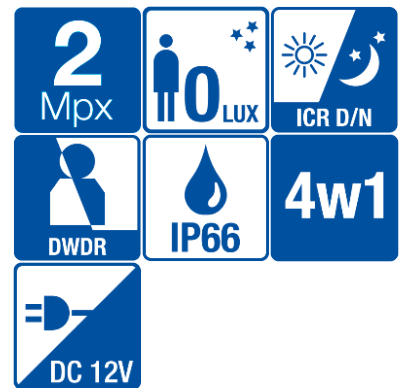

Key features:

- Sensor 1/2.7" 2Mpx PS CMOS
- Resolution 1920×1080@30kl/s
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, AWB, AES
- Digital Noise Reduction DNR
- Wide Dynamic Range D-WDR
- Screen menu OSD
- Motozoom lens 2.7~13.5mm
- IR 3 Led array distance up to 40m with life time up to 50 000 hours
- Protection IP66
- Working environment -30°C ~ +60°C
- System switch
- Power supply 12V DC(±10%)
- **BCS-DMQE3202IR3-B** – version in white

Dimensions:

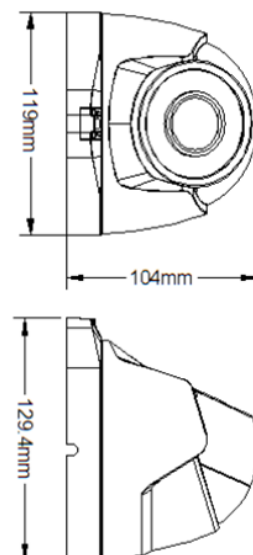

BCS-DMQE3202IR3(-B)

2Mpx IR eyeball camera HDCVI/AHD/TVI/ANALOG with motozoom lens

Specification:

| | |
|------------------------|--|
| Scanning system | Progressive Scan |
| System | HDCVI/AHD/TVI/ANALOG |
| Sensor | 1/2.7" 2Mpx CMOS |
| Pixels | 1920(H) × 1080(V) |
| Resolution | 1080P(1920×1080) / 720P(1280×720) |
| Video out | HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm |
| Minimum illumination | B/W: 0Lux (IR On) |
| S/N ratio | 41dB (AGC Off) |
| White balance | (AWB) Auto/manual |
| Lens | Motozoom 2.7~13.5mm Auto Focus |
| Backlight compensation | D-WDR |
| Shutter | Auto |
| Gain control | (AGC) Auto/Manual |
| Noise Reduction | 2D/3D DNR |
| Motion Detect | 4 areas |
| Privacy masking | 16 areas |
| Day/Night | IR-cut filter with auto switch (ICR) |
| IR | IR 3 Led array distance up to 40m |
| Power supply | 12V DC (±10%) |
| Power consumption | <6.5W |
| Working environment | -30°C ~ +60°C, IP66 |
| Weight | 0.5kg |
| Dimensions | 119mm(129.4mm) × 104mm |