

## BCS-TQ4203IR3-G(-B)


2Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with 2.8mm lens



### Key features:

- Sensor 1/2.8" 2Mpx Sony Starvis CMOS
- Resolution 1080P@30fps, 720P@60fps
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, AWB, AES, Defog, BLC, HLC
- Digital Noise Reduction DNR
- Wide Dynamic Range WDR(120dB)
- Privacy masking
- Motion detect
- IR leds distance up to 40m
- Screen menu OSD
- Fixed lens 2.8mm
- Protection IP66
- Working environment -30°C ~ +60°C
- System switch
- Built in microphone, audio out
- Power supply 12V DC(±10%)
- **BCS-TQ4203IR3-B** – version in white

### Dimensions:

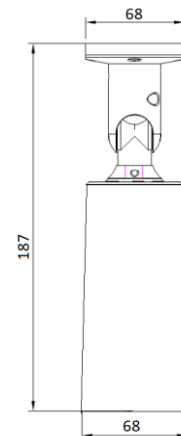

**BCS-TQ4203IR3-G(-B)**

2Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with 2.8mm lens

**Specification:**

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.8" 2Mpx SONY STARVIS CMOS + Eyenix
Pixels	1920(H) × 1080(V)
Resolution	1080P(1920×1080)@25/30fps 720P(1280×)@50/60fps
Video out	HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	Color: 0.01Lux@F1.2(AGC On) B/W: 0Lux (IR On)
S/N ratio	>50dB
White balance	(AWB) Auto/manual
Lens	Fixed lens 2.8mm F1.2
Backlight compensation	BLC/HLC/WDR(120dB)
Shutter	Auto
Gain control	(AGC) Auto/manual
Noise Reduction	DNR
Image rotate	Mirror/flip
Privacy masking	16
Motion detect	4
Audio	Built in microphone, audio out RCA
Day/Night	IR-cut filter with auto switch (ICR)
IR	IR leds distance up to 40m
Power supply	12V DC (±10%)
Power consumption	<10W
Working environment	-30°C ~ +60°C
Weight	0.5kg
Dimensions	187mm × 68mm
Casing	Metal, IP66

