

BCS-TQ7203IR3-G(-B)


2Mpx STARVIS IR bullet camera HDCVI/AHD/TVI/ANALOG with motozoom lens



Key features:

- Sensor 1/2.8" 2Mpx SONY STARVIS CMOS
- Resolution 1920×1080@30fps
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, AWB, AES, BLC, HLC, WDR(120dB), Defog
- Digital Noise Reduction DNR
- IR leds distance up to 50m
- Screen menu OSD
- Motion detect, privacy masking
- Motozoom lens 2.7~13.5mm
- Protection IP66
- Working environment -30°C ~ +60°C
- System switch
- Built in microphone, audio out
- Power supply 12V DC(±10%)
- **BCS-TQ7203IR3-B** – version in white

Dimensions:

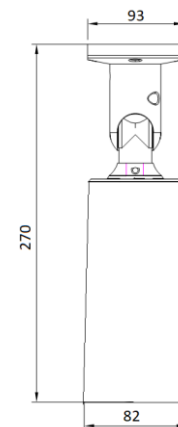

BCS-TQ7203IR3-G(-B)

2Mpx STARVIS IR bullet camera HDCVI/AHD/TVI/ANALOG with motozoom lens

Specification:

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.8" 2Mpx SONY STARVIS IMX307 CMOS + Eyenix
Pixels	1920(H) × 1080(V)
Resolution	1080P(1920×1080)@25/30fps 720P(1280×720)@25/30fps
Video out	HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	B/W: 0Lux (IR On)
S/N ratio	>50dB
White balance	(AWB) Auto
Lens	Motozoom lens 2.7~13.5mm
Backlight compensation	BLC/HLC/WDR(120dB)
Shutter	Auto
Gain control	(AGC) Auto/manual
Noise Reduction	DNR - regulation
Image rotate	Mirror/flip
Motion detect	4 areas
Privacy masking	16 areas
Audio	Built in microphone, audio out RCA
Day/Night	IR-cut filter with auto switch (ICR)
IR	IR leds distance up to 50m
Power supply	12V DC (±10%)
Power consumption	<10W
Working environment	-30°C ~ +60°C
Weight	1kg
Dimensions	270mm × 82mm × 93mm
Casing	Metal, IP66

