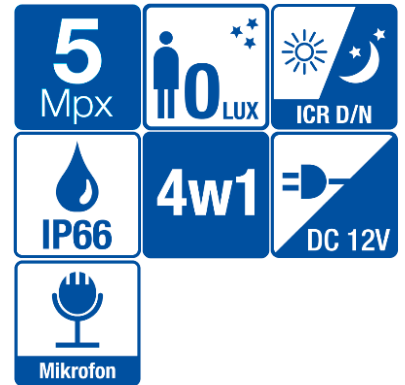
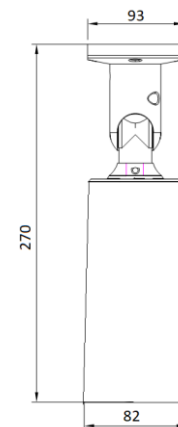


BCS-TQ7503IR3-G(-B)

5Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with motozoom lens

**Key features:**

- Sensor 1/2.7" 5Mpx CMOS
- Resolution 2592×1944@20fps
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, ATW, AES, BLC, D-WDR
- Digital Noise Reduction DNR
- IR leds distance up to 50m
- Screen menu OSD
- Motozoom lens 2.8~12mm
- Protection IP66
- Working environment -30°C ~ +60°C
- System switch
- Built in microphone, audio out
- Power supply 12V DC(±10%)
- **BCS-TQ7503IR3-B** – version in white

Dimensions:

BCS-TQ7503IR3-G(-B)

5Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with motozoom lens

Specification:

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.7" 5Mpx CMOS OmniVision PureCel OS05A10 + NVP2477H
Pixels	2592(H) × 1944(V)
Resolution	AHD/TVI: 5Mpx(2592×1944)@20fps AHD/TVI/CVI: 4Mpx(2560×1440)@25/30fps
Video out	HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	B/W: 0Lux (IR On)
S/N ratio	>50dB
White balance	(ATW) Auto/manual
Lens	Motozoom lens 2.8~12mm
Backlight compensation	BLC/D-WDR
Shutter	Auto/FLK
Gain control	(AGC) Auto/manual
Noise Reduction	2D/3D DNR
Image rotate	Mirror/flip
Audio	Built in microphone, audio out RCA
Day/Night	IR-cut filter with auto switch (ICR)
IR	IR leds distance up to 50m
Power supply	12V DC (±10%)
Power consumption	<10W
Working environment	-30°C ~ +60°C
Weight	1kg
Dimensions	270mm × 82mm × 93mm
Casing	Metal, IP66

