

BCS-TQ8504IR3-G(-B)


5Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with motozoom



Key features:

- Sensor 1/2.7" 5Mpx CMOS
- Resolution 2592×1944@20fps
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, AWB, AES
- Digital Noise Reduction DNR
- Wide Dynamic Range WDR(100dB)
- IR leds distance up to 70m
- Screen menu OSD
- Motozoom lens 5~50mm
- Protection IP66
- Working environment -30°C ~ +60°C
- System switch
- Power supply 12V DC(±10%)
- **BCS-TQ8504IR3-B** – version in white

Dimensions:

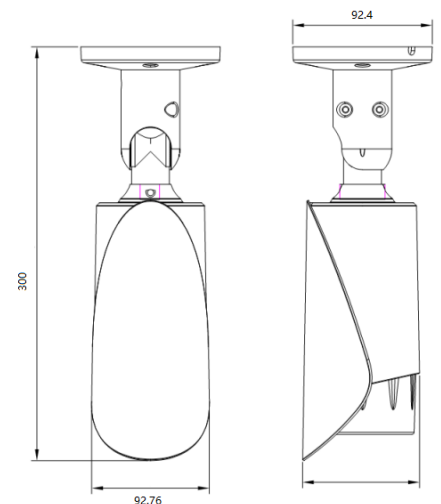

BCS-TQ8504IR3-G(-B)

5Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with motozoom

Specification:

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.7" 5Mpx CMOS OmniVision PureCel OS05A10 + NVP2477H
Pixels	2592(H) × 1944(V)
Resolution	AHD/TVI: 5Mpx(2592×1944)@20kl/s AHD/TVI/CVI: 4Mpx(2560×1440)@25/30kl/s
Video out	HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	B/W: 0Lux (IR On)
S/N ratio	>50dB (AGC Off)
White balance	(AWB) Auto/manual
Lens	Motozoom 5~50mm auto focus
Backlight compensation	WDR(100dB)
Shutter	Auto
Gain control	(AGC) Auto
Noise Reduction	3D DNR
Day/Night	IR-cut filter with auto switch (ICR)
IR	IR leds distance up to 70m
Power supply	12V DC (±10%)
Power consumption	<8W
Working environment	-20°C ~ +60°C, IP66
Weight	1.1kg
Dimensions	300mm × 93mm

