



BCS-TQE3200IR3-G(-B)(II)

Bullet camera 2Mpx HDCVI/AHD/TVI/ANALOG with lens 2.8mm

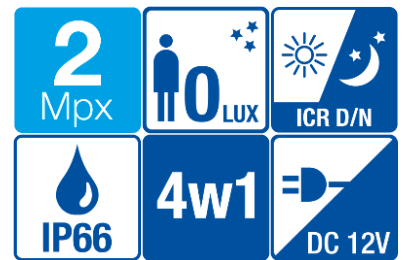

- Sensor 1/2.9" 2Mpx PS CMOS
- Resolution 1920×1080@30fps
- 4 systems: HDCVI/AHD/TVI/ANALOG
- IR cut filter with auto-switch
- Functions AGC, ATW, AES, 3DNR, BLC, DWDR
- OSD screen menu
- Fixed lens 2.8mm
- IR range up to 40m
- Metal outside casing IP66
- Working environment -20°C ~ +60°C
- DIP switch
- Power supply 12V DC
- **BCS-TQE3200IR3-B(II)** -white version

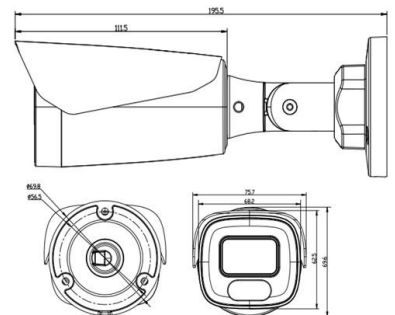

BCS-TQE3200IR3-G(-B)(II)

Bullet camera 2Mpx HDCVI/AHD/TVI/ANALOG with lens 2.8mm

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.9" 2Mpx PS CMOS SONY IMX323+V30H
Pixels	1920(H) × 1080(V)
Resolution	1920 × 1080@25/30fps, 720P@25/30fps
Video out	HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Min. illumination	0.01Lux @ (F1.2,AGC ON), 0 Lux with IR
S/N ratio	>52dB
White balance	(ATW) Auto/manual
Lens	Fixed 2.8mm
Backlight compensation	BLC/DWDR
Shutter	AES Auto/manual
Gain control	(AGC) Auto/manual
Noise reduction	3D DNR
Day/night	IR cut filter with auto-switch
IR	40m
Power supply	12V DC (±10%)
Power consumption	<4W
Working environment	-20°C ~ +60°C, RH<90%
Casing	Metal IP66
Weight	0.4kg
Dimensions	195.5mm×76mm×69mm



BCS-TQE3200IR3-G(-B)(II)

Bullet camera 2Mpx HDCVI/AHD/TVI/ANALOG with lens 2.8mm

Adapter
BCS-ATQ35-G(-B)(II)

