


BCS-TQE4500IR3-G(-B)


5Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with 3.6mm lens

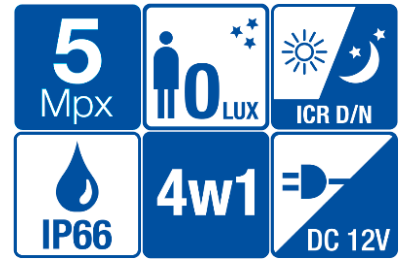

Key features:

- Sensor 1/2.5" 5Mpx PS CMOS
- Resolution 2592×1944@20kl/s
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, AWB, AES, DWDR
- Digital Noise Reduction DNR
- IR leds distance up to 40m
- Screen menu OSD
- Fixed lens 3.6mm
- Protection IP66
- Working environment -30°C ~ +60°C
- System switch
- Power supply 12V DC(±10%)
- **BCS-TQE4500IR3-B** – version in white

Dimensions:

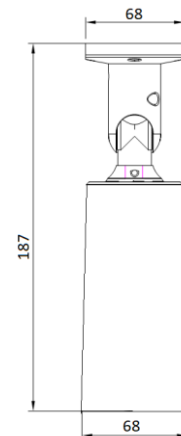

BCS-TQE4500IR3-G(-B)

5Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with 3.6mm lens

Specification:

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.5" 5Mpx CMOS K03 + FH8538M
Pixels	2592(H) × 1944(V)
Resolution	AHD/TVI: 5Mpx(2592×1944)@20kl/s, 1080P(1920×1080)@25/30fps AHD/TVI/CVI: 4Mpx(2560×1440)@25/30fps, 1080P(1920×1080)@25/30fps
Video out	HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	Color: 0.02Lux@F1.2(AGC On) B/W: 0Lux (IR On)
S/N ratio	>50dB
White balance	(AWB) Auto/manual
Lens	Fixed lens 3.6 mm F1.2
Backlight compensation	DWDR
Image rotate	Mirror/flip
Shutter	Auto
Gain control	(AGC) Auto/manual
Noise Reduction	DNR
Day/Night	IR-cut filter with auto switch (ICR)
IR	IR leds distance up to 40m
Power supply	12V DC (±10%)
Power consumption	<10W
Working environment	-30°C ~ +60°C
Weight	0.5kg
Dimensions	187mm × 68mm
Casing	Metal, IP66

