

BCS-TQE6200IR3-B(-G)


2Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with 2.8~12mm lens



Key features:

- Sensor 1/2.9" 2Mpx PS CMOS
- Resolution 1920×1080@30fps
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, AWB, BLC
- Digital Noise Reduction DNR
- Wide Dynamic Range D-WDR
- IR leds distance up to 50m
- Screen menu OSD
- Varifocal lens 2.8~12mm
- Protection IP66
- Working environment -20°C ~ +60°C
- System switch
- Power supply 12V DC(±10%)
- **BCS-TQE6200IR3-G** – version in dark

Dimensions:

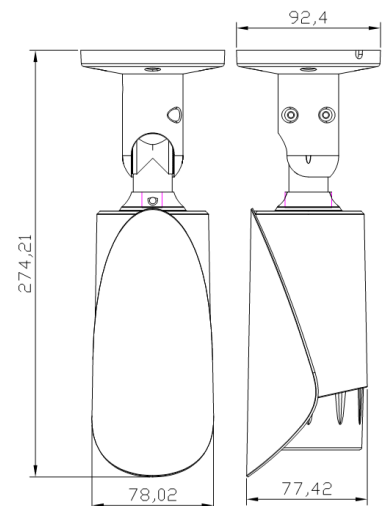

BCS-TQE6200IR3-B(-G)

2Mpx IR bullet camera HDCVI/AHD/TVI/ANALOG with 2.8~12mm lens

Specification:

| | |
|------------------------|--|
| Scanning system | Progressive Scan |
| System | HDCVI/AHD/TVI/ANALOG |
| Sensor | 1/2.9" 2Mpx SONY CMOS IMX323 + FH8536H |
| Pixels | 1920(H) × 1080(V) |
| Resolution | 1080P(1920×1080)@25/30fps / 720P(1280×720)@25/30fps |
| Video out | HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm |
| Minimum illumination | Color: 0.01Lux@F1.2(AGC On) B/W: 0Lux (IR On) |
| S/N ratio | >50dB (AGC Off) |
| White balance | (AWB) Auto/manual |
| Lens | Varifocal 2.8~12mm F1.2 |
| Backlight compensation | BLC / D-WDR |
| Shutter | Auto |
| Gain control | (AGC) Auto |
| Noise Reduction | 3D DNR |
| Day/Night | IR-cut filter with auto switch (ICR) |
| IR | IR leds distance up to 50m |
| Power supply | 12V DC (±10%) |
| Power consumption | <8W |
| Working environment | -20°C ~ +60°C, IP66 |
| Weight | 0.75kg |
| Dimensions | 274mm × 78mm |