


BCS-SP16G04G-4SFP-M

16-Port Gigabit Managed Switch 16 × PoE + 4 × Combo (RJ45 & SFP)

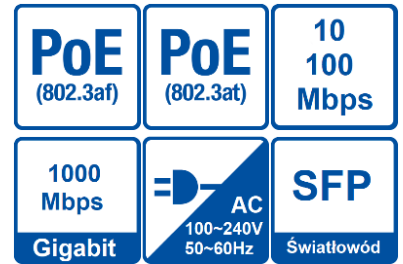

- 16-port managed PoE switch
- PoE IEEE802.3 af / at standard
- Maximum power up to 30W for a single PoE port
- 16 PoE 1 Gbps ports
- 4 RJ45 combo 1 Gbps ports
- 4 SFP Gigabit fiber ports
- RJ45 management console port
- MDI / MDIX function
- Metal housing
- Can be installed in a 1U RACK cabinet
- 4KV surge protection
- 100 ~ 240V AC power supply

BCS-SP16G04G-4SFP-M

16-Port Gigabit Managed Switch 16 × PoE + 4 × Combo (RJ45 & SFP)

Ports	16 × RJ45 PoE Gigabit
Uplink ports (MDI / MDIX)	4 × RJ45&SFP Gigabit
Transmission	10/100/1000Mbps half-duplex, full-duplex, auto-negotiation
PoE standard	IEEE802.3 af/at
Ethernet standard	IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX/100BASE-FX, IEEE802.3ab 1000BASE-T, IEEE802.3z 1000BASE-SX/1000BASE-LX, IEEE802.3x Full duplex and flow control, IEEE802.1Q Tag VLANs
Forwarding Packets	47.616 Mpps
Capacity	56Gbps
Delay	< 7μs
Packet Buffer	4 Mbits
Package length	10kB
MAC table	8K
Maximum power	30W for a single PoE port
Management system functions	Redundant network: STP/RSTP, Multicast: IGMP Snooping V1/V2, VLAN: IEEE 802.1Q 4K VLAN, QinQ, Link Aggregation: manual, Management Function: CLI/WEB/SNMP, Diagnostic Maintenance: Port mirroring, Ping, Alarm management: 1-way relay alarm output, RMON, SNMP Trap, Security: DHCP Snooping, User hierarchical management
PoE pin	1,2(+); 3,6(-)
Power	100~240V AC 50/60Hz
Dimensions	440×200×45mm
Weight	3.6kg
Working conditions	0°~50°C, 5%~90%RH
MTBF	65000 hours

