


BCS-V-EI432IR3-Ai(II)

4Mpx dome network camera with 2.8mm lens



- 1/3 "4Mpx PS CMOS sensor
- DarkView technology
- Support for three coding streams
- Resolution 2688 × 1520 @ 30fps
- H.265 + / H.264 + / MJPEG compression
- ICR mechanical infrared filter
- AGC, AWB, AES, BLC, HLC, WDR (120dB), 3D DNR, ROI functions
- Motion detection, privacy mask
- Intelligent functions: intrusion into area, line crossing, perimeter protection, scene change
- Built-in web service, compliance with BCS-NVR, CMS (BCS Manager), BCS mobile application (android, iOS), P2P, Onvif
- 2.8mm F1.4 fixed focal length lens
- Infrared with a range of up to 30m
- MicroSD memory card slot up to 256GB
- IP67 metal outdoor housing
- Working temperature -30 ° C ~ + 60 ° C
- DC 12V, PoE (802.3af) power supply

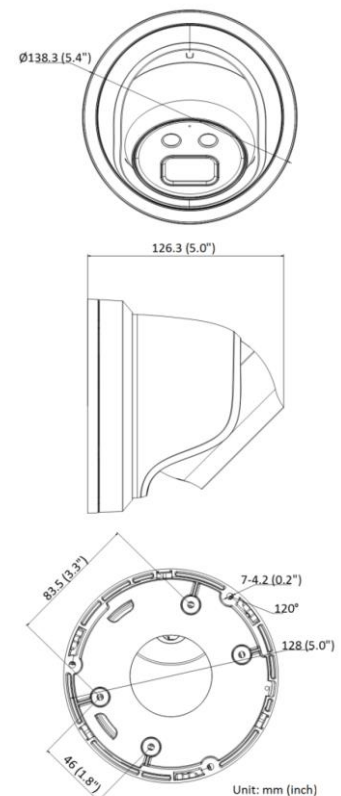

BCS-V-EI432IR3-Ai(II)

4Mpx dome network camera with 2.8mm lens

Video system	IP
Scanning system	Progressive Scan
Sensor	1/3" 4Mpx CMOS
Pixels	2688(H) × 1520 (V)
Min illumination	Color: 0.003Lux@F1.4 (AGC), B/W: 0Lux
Lens	Fixed 2.8mm F1.4
Viewing angle	H: 103°, V: 55°
DORI	Detect 60m / Observe 24m / Recognize 12m / Identify 6m
White balance	(AWB) Auto/manual
Background compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1/3~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	3D DNR
Day / night function	ICR
Infrared	30m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG(second stream)
Main stream	50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)
Second stream	50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360)
Third Stream	50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360) 60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)
Network connection	RJ-45 (10/100Mbps)
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, ARP
Memory card	microSD do 256GB
Compatibility	ONVIF(S / G / T)
Users	Max 32
Mobile users	iOS, android
Power	DC12V(±25%) / PoE(802.3af)
Power consumption	12 VDC, 0.48 A, max. 5.8 W PoE (802.3af, 36 V do 57 V), 0.19 A do 0.12 A, max. 6.8 W
Working conditions	-30°C ~ +60°C, 10%~95% RH
Case	Metal IP67
Weight	0.77kg
Dimensions	∅ 138.3 × 126.3 mm



BCS-V-EI432IR3-Ai(II)

4Mpx dome network camera with 2.8mm lens

Adapter
BCS-V-ADE



Wall mount
BCS-V-UDE

