


## BCS-L-NVR0401-4KE

4 channel 1xHDD network video recorder



- Display and record 4 IPC with max resolution 8Mpx
- Compression H.265+/H265/H.264+/H.264/MJPEG
- Max incoming bandwidth 80Mbps
- Motion detect, privacy masking
- Support intelligent functions from IPC: perimeter protection (4 channels), face detection (4 channels), SMD Plus (4 channels)
- Video output HDMI 4K and VGA 1080P
- Support 1 HDD SATA up to 10TB
- 2xUSB, 1xRJ45
- 1 audio in / 1 audio out
- Built-in web service, support CMS (BCS Manager), mobile app BCS (iOS, android), P2P, Onvif
- Power supply DC 12V

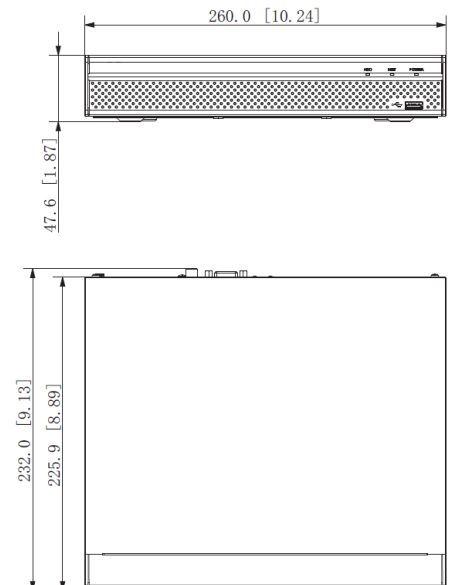

### BCS-L-NVR0401-4KE

#### 4 channel 1xHDD network video recorder

Processor	Industrial-grade embedded processor
Operating system	LINUX
Functionality	Real-time view, record, playback, archive, remote access
System control	Mouse, network
IPC channels	4
Video out	1xHDMI 4K, 1xVGA 1080P
Resolution	VGA: 1920 × 1080 , 1280 × 1024, 1280 × 720 , 1024 × 768 HDMI: 3840 × 2160 , 1920 × 1080 , 1280 × 1024, 1280 × 720 , 1024 × 768
Multi screen display	1/4
Sequence	Yes
Decoding Capability	4 × 1080p@30 fps
Bandwidth	Incoming 80Mbps, outgoing 60Mbps, storage 80Mbps
Recording resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 1.3MP, 720P, D1
Compression	Smart H.265+/H.265/Smart H.264+/H.264/MJPEG
Audio	1 input / 1 output
Audio compression	PCM/G711A/G711U/G726/AAC
Synchronous playback	4 channels
Archive	Flash drive(USB) / Network download
Network	Port RJ-45 (10/100Mbps)
Protocols	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; IP Search; P2P
Mobile users	iOS, android
Compatibility	ONVIF(S/G/T)
Hard drive	1xSATA max 10TB
Interfaces	2xUSB2.0
Power supply	12V DC, 2A, power consumption <10W
Working environment	-10°C ~+55°C / 10~90%RH
Dimensions and weight	1U, 260 mm × 232.5 mm × 50.3 mm, 0.8kg

